TECHNICAL DATA SHEET



PIVOT 3 Hole Bath Filler


Product Specification

Product Code: Finish: Product Type: Construction:

Valve Type: Supply: Inlet Connection: Working Pressures: PIV 3HBF C Chrome plated Contemporary Bodies are of all brass construction and is designed to conform to BS EN 200 ¾" CD Valve ¼ Turn Suitable for all plumbing systems ¾" BSP Threaded Tail Min 0.2 Bar Max 5.0 Bar

Additional Information

- •Chrome plated to BS EN 248.
- Supplied with metal handles.

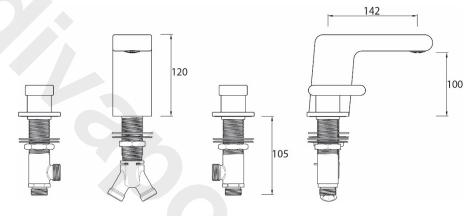

Flow Rates (litres per minute)

System Pressure	0.2 bar	0.5 bar	1.0 bar	2.0 bar	3.0 bar	4.0 bar
PIV 3HBF C (mixed)	11.4	32.0	44.9	63.5	77.8	89.8

Technical Advice:

For further information please call 0844 7016273 or email <u>customercare@bristan.com</u>.

Guarantee:

5 years covering manufacturing faults.

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG Telephone: 0844 701 6274 Facsimile: 0844 701 6275 Web Site: www.bristan.com Email: enguire@bristan.com



D1

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.