

PIVOT

Recessed Thermostatic Dual Control Shower Valve with Integral Two Outlet Diverter & Stopcock


Product Specification

Product Code: PIV SHC3DIV C
Finish: Chrome
Product Type: Contemporary
Construction: Body is of brass construction
Supply: Suitable for all plumbing conditions, preferably balanced. The inlet hot water temperature must be at least 10% above the required blend temperature.
Inlet Connections: 15mm Compression connections
Working Pressures: Min 0.2 Bar, Max 5.0 Bar



Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 45-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rate at 0.2 Bar (open outlet without flow regulators) is 8 l/min from diverter, 9 l/min from stopcock. 12l/min from both outlet together
- Requires rear access to service the filters
- Cartridge can be accessed from front

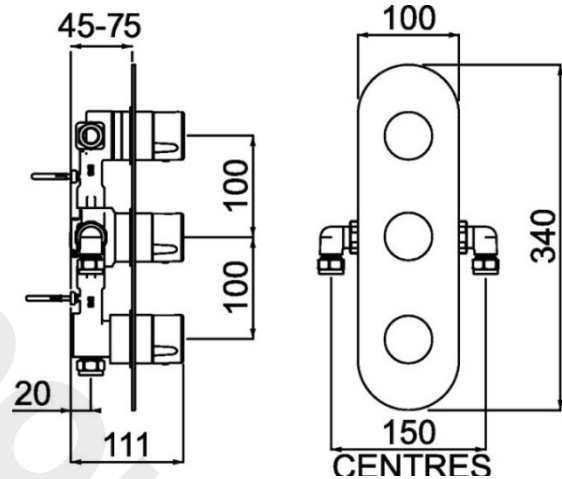

Flow Rates (litres per minute)

| System Pressure | 0.2bar | 0.5bar | 1.0bar | 2.0bar | 3.0bar | 5.0bar |
|---------------------|--------|--------|--------|--------|--------|--------|
| Outlet 1 (CD Valve) | 9.48 | 15 | 21.2 | 30 | 36.72 | 47.41 |
| Outlet 2 (Diverter) | 8.27 | 13.08 | 18.5 | 26.16 | 32.04 | 41.37 |
| Outlet 3 (Diverter) | 8.05 | 12.73 | 18 | 25.46 | 31.18 | 40.25 |

Compliance / Approvals

WRAS Approval No: 1507041

Technical Advice: For further information please call 0844 7016273 or email customer@bristan.com

Guarantee: 5 years covering manufacturing faults.

