



Specification

Product Type:	Bath Tap
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Lever
Connection Inlet:	3/4" BSP
Number of Tap Holes:	2
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure: (bar)	0.2
Maximum Dynamic Pressure: (bar)	5.0
Maximum Hot Water Temperature: °C	60
Maximum Static Pressure: (bar)	10
Flow Type:	Dual
Isolation Included:	No
Check Valve Supplied:	No

Features:


- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Easy to use lever handles
- Dual flow prevents hot water entering the mains supply
- High performance even at low pressures

Product Certifications:



WRAS Cert. Number: 2009903
WRAS Expiry Date: 30/09/2025

Dimensions (measurements in mm)

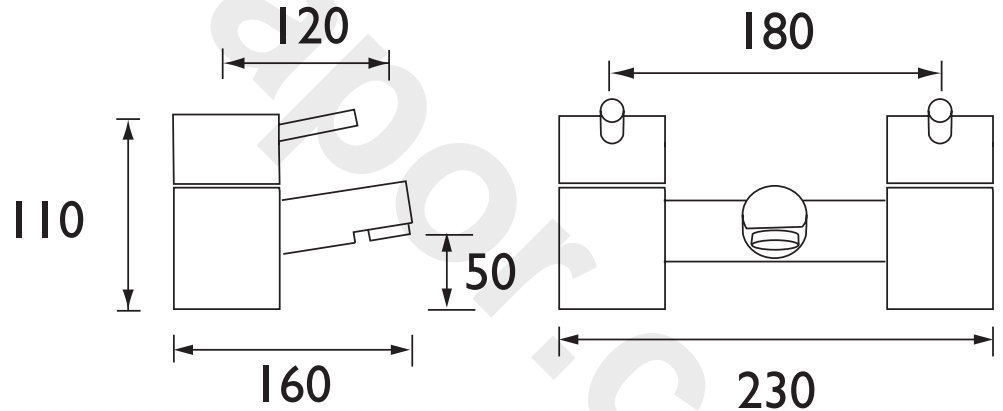

For more products, visit our website:
<http://www.bristan.com>



Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
PM BF C	27.9	47	67.6	96.2	117.8	152

TECHNICAL DATA SHEET



BRISTAN