



Features:

- Long life ceramic cartridge for added durability and ease of use
- Easy to use lever handle
- Includes 1.5m hose, rub-clean anti-limescale handset and wall bracket
- Minimum working pressure of 1.0 bar

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Product Type:	Bathroom Tap
Main Construction Material:	Brass
Mount Type:	Wall Mounted
Handle Type:	Single Lever Handle
Connection Inlet:	3/4" BSP
Connection Outlet:	M28 Flow Straightener
Number of Tap Holes:	2
Valve/Cartridge Type:	40mm Ceramic Cartridge
Plumbing System Requirements:	Suitable for high pressure systems
Minimum Dynamic Pressure:	1.0 Bar
Maximum Dynamic Pressure:	5.0 Bar
Maximum Hot Water Temperature: °C	65
Maximum Static Pressure: (bar)	10
Flow Type:	Single Flow
Isolation Included:	No

Dimensions (measurements in mm)

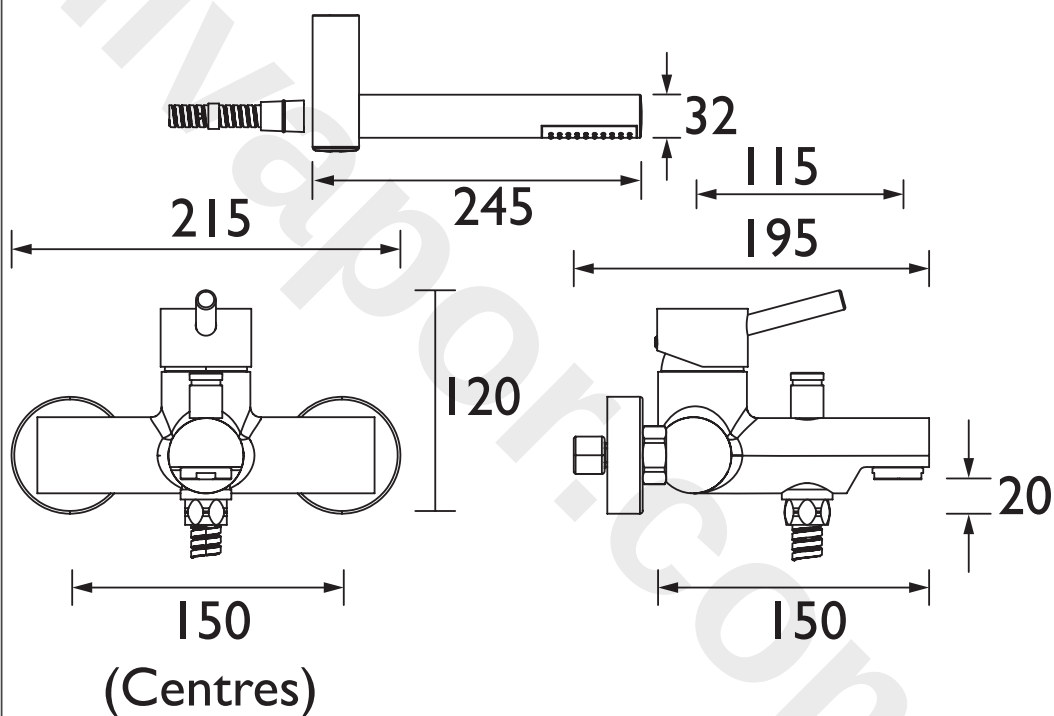

Flow Rates (l/min)

System Pressure (bar)	1	2	3	5
PM WMBSM C (Mixed)	16.8	23.7	29.3	37.5
Through Handset	8.3	11.7	15.1	18.5

TECHNICAL
DATA
SHEET



BRISTAN

D7