
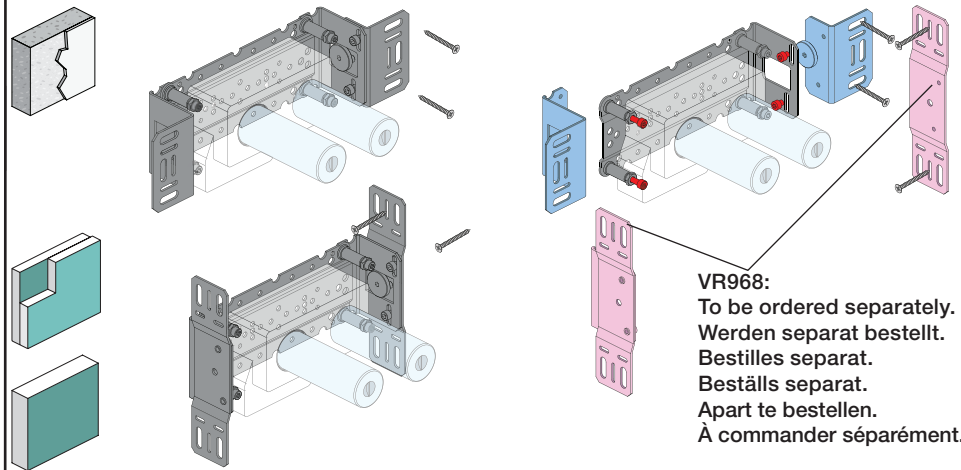
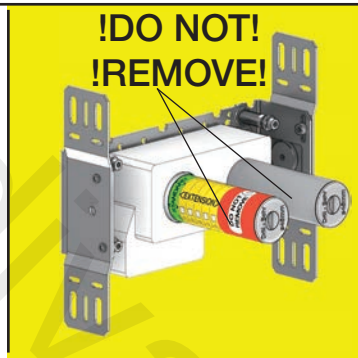


voilà

[illegible]

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.

B Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter
Nazitten lokale regelgeving.
Vérifiez la législation locale.




  DE:
Bitte separat beiliegende Anleitung für die Schallentkopplung
VR972 beachten








Box till inbyggnadsblandare.
 Boks til indbygningsblander.
 Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.

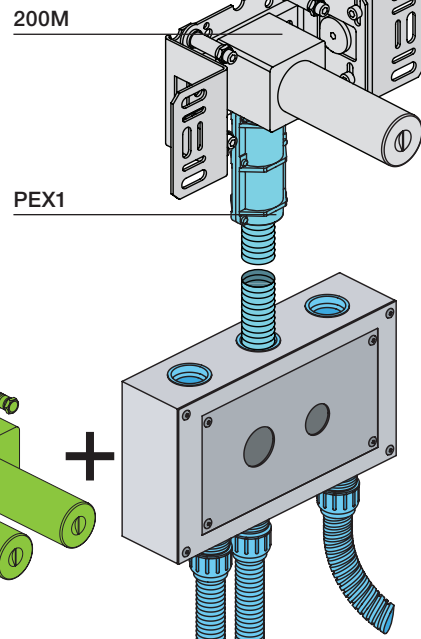

Technical drawing of a brass hexagonal nut. A callout box shows six options for thread specifications, each represented by a circle with a central dot and a label: STD, +10, +20, +30, +40, and +50. The nut is shown in a perspective view, and a smaller detail view of the nut's internal thread is shown below it.


Y Min. 48 mm
Max. 110 mm

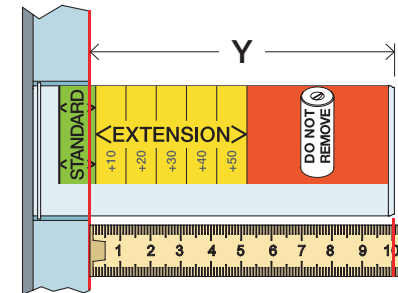

	T	Y	VR699/VR2019
	5 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50



Montering af forlængerdele
Montering av förlängning

VR699+

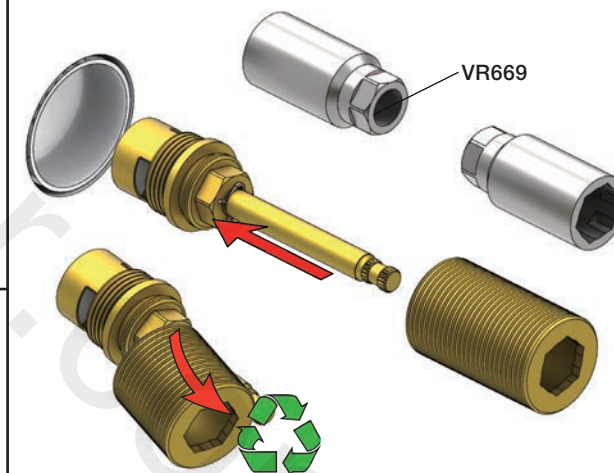

X₅₂ - 0 mm


X_{-15 - 0 mm}








	X	VR699/VR2019
	40 - 52 mm	Std.
	30 - 40 mm	+10
	20 - 30 mm	+20
	10 - 20 mm	+30
	0 - 10 mm	+40
	-10 - 0 mm	+50








Montage van de verlengstukken
Montage des rallonges

VR2019+, VR2119+

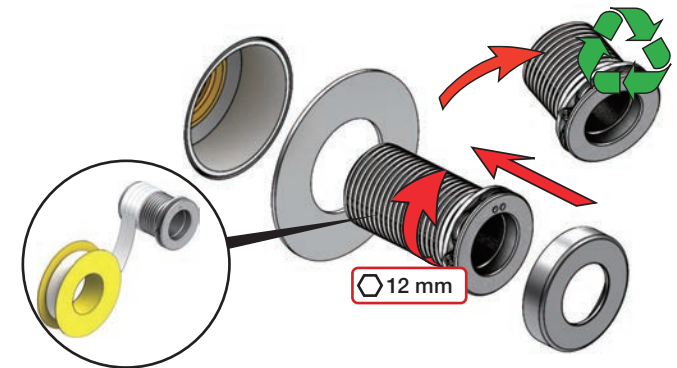


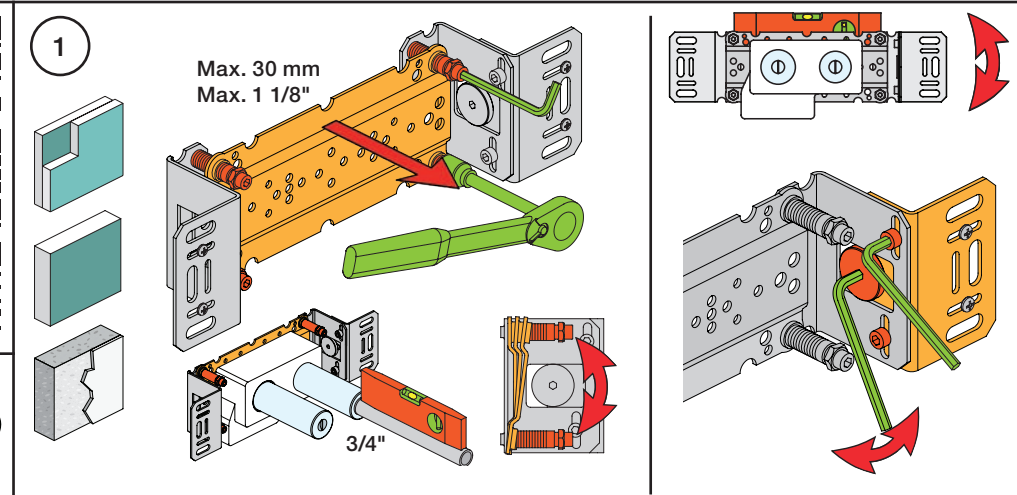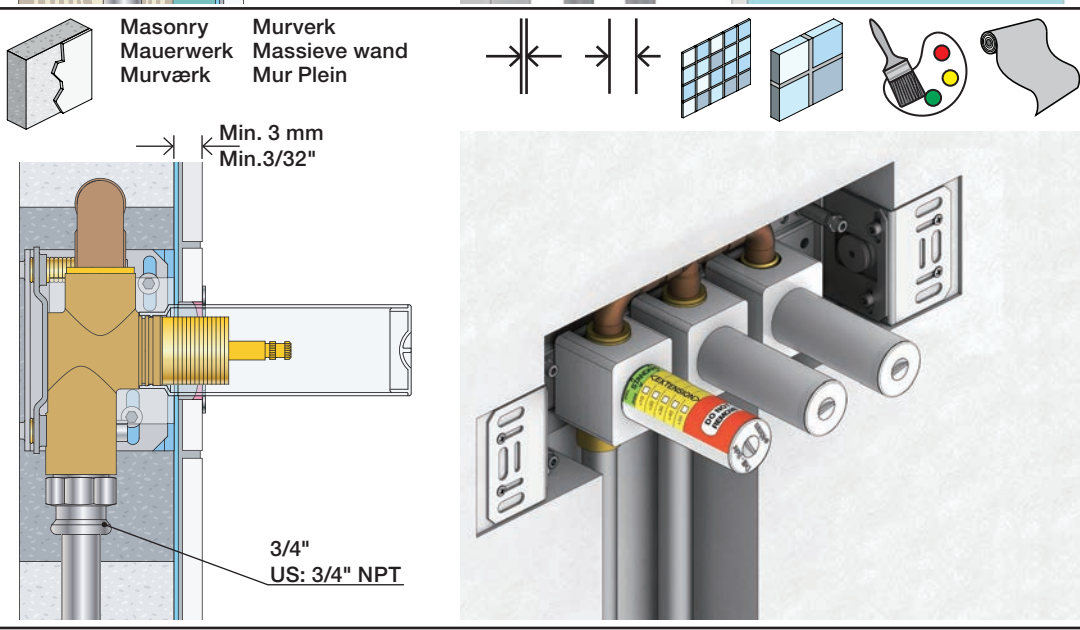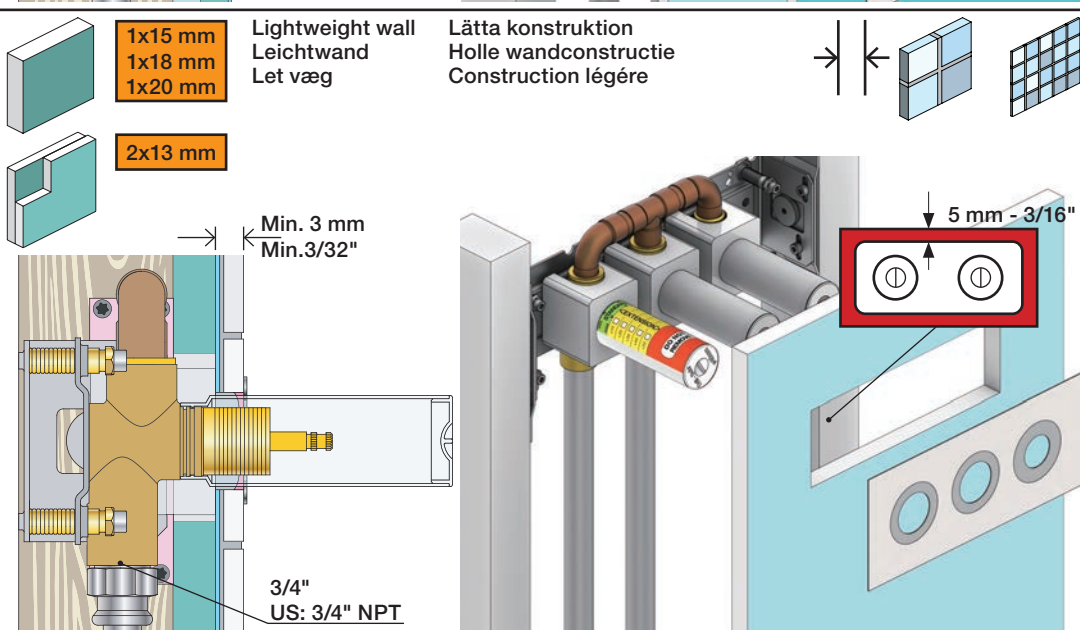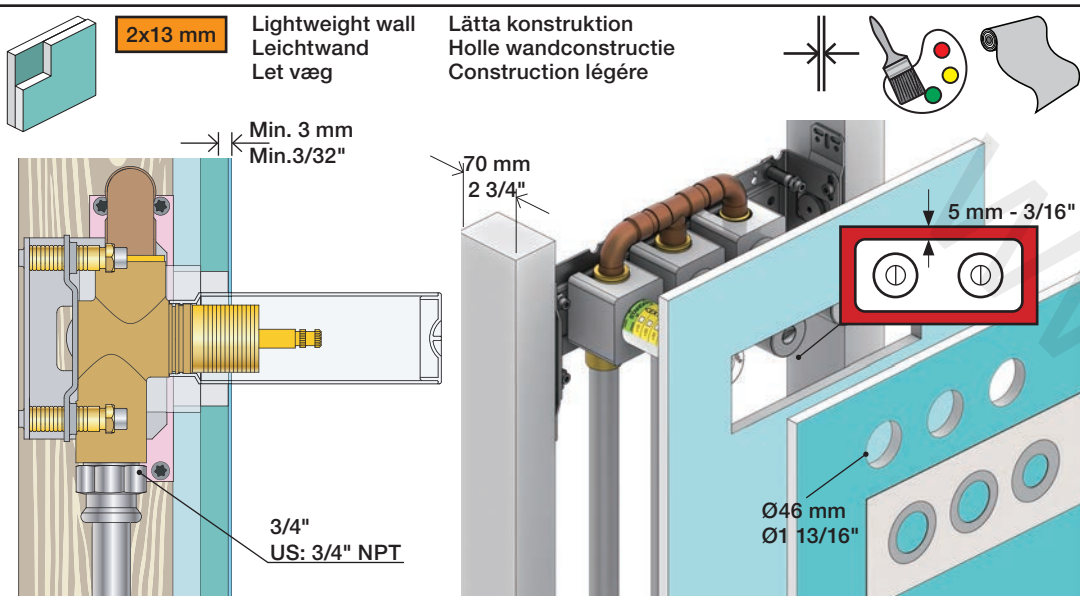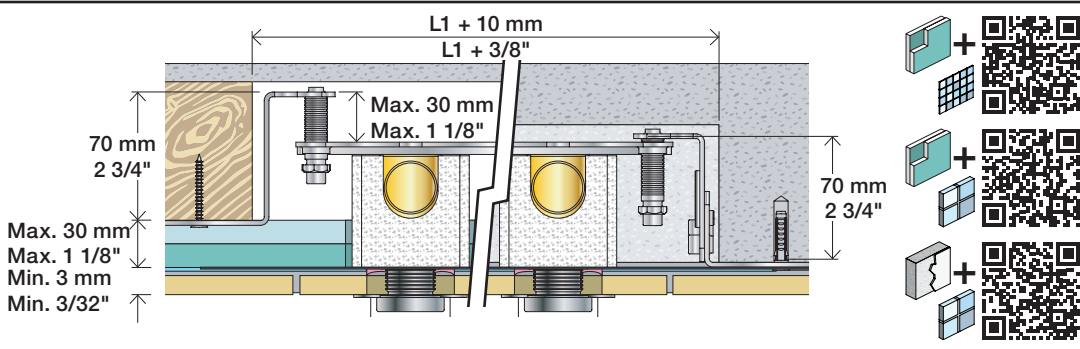

2 Test Pressure Prüfdruck testtryk Test tryk Test druk test de pression ! Water - Wasser - Vand - Vatten - Water - L'eau ! MAX 1 Minute - Minut - Minuut !

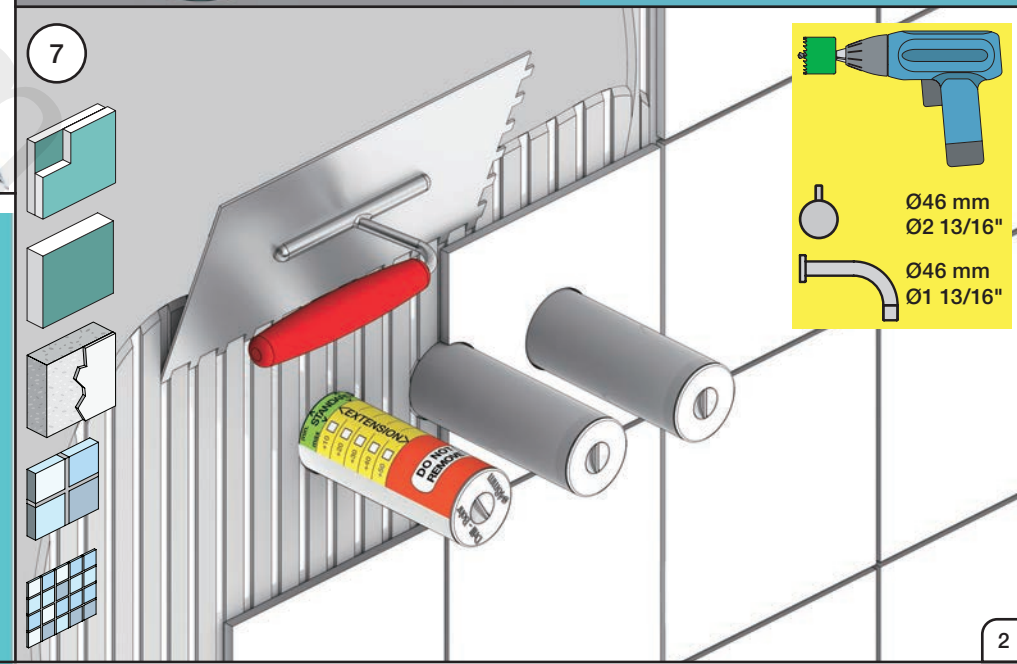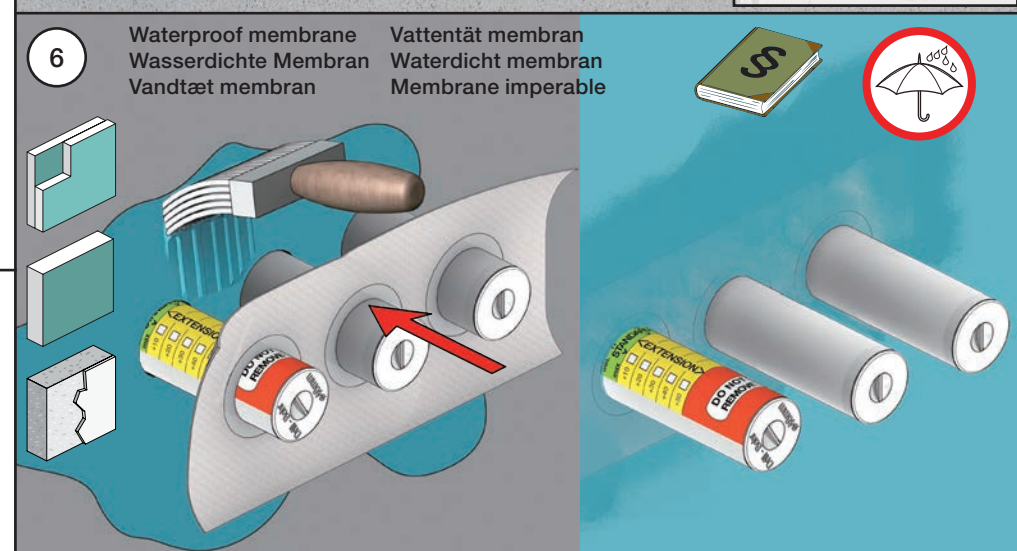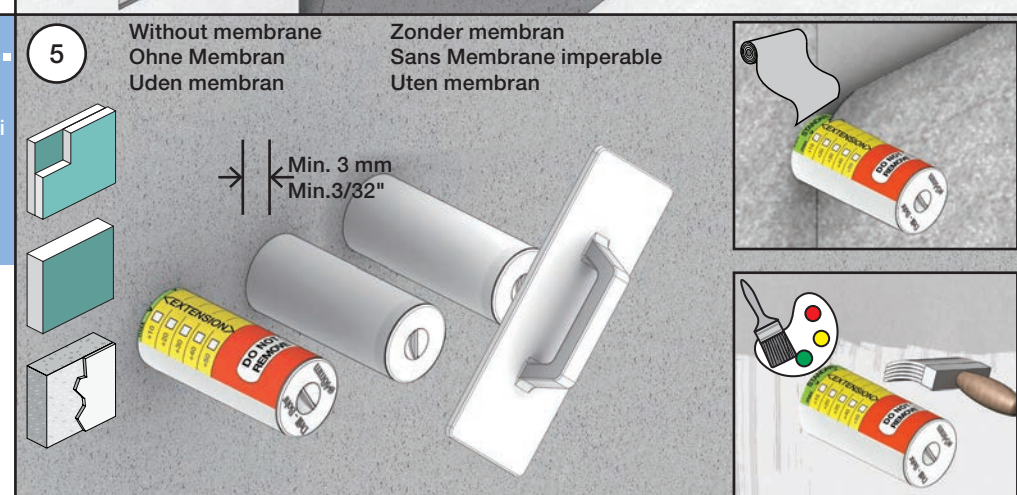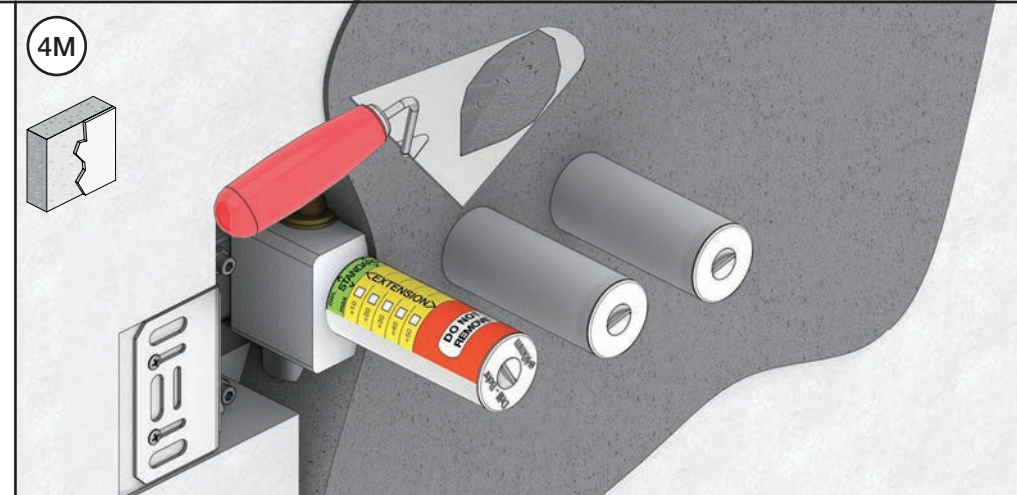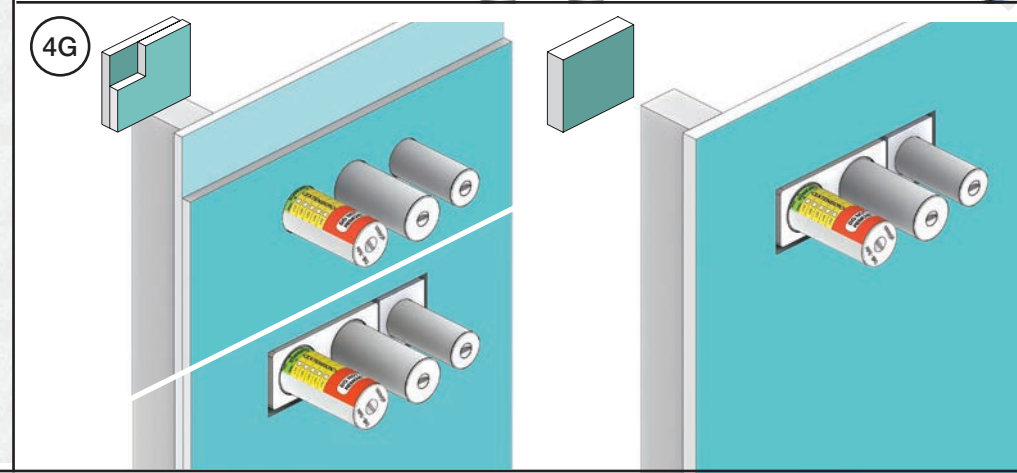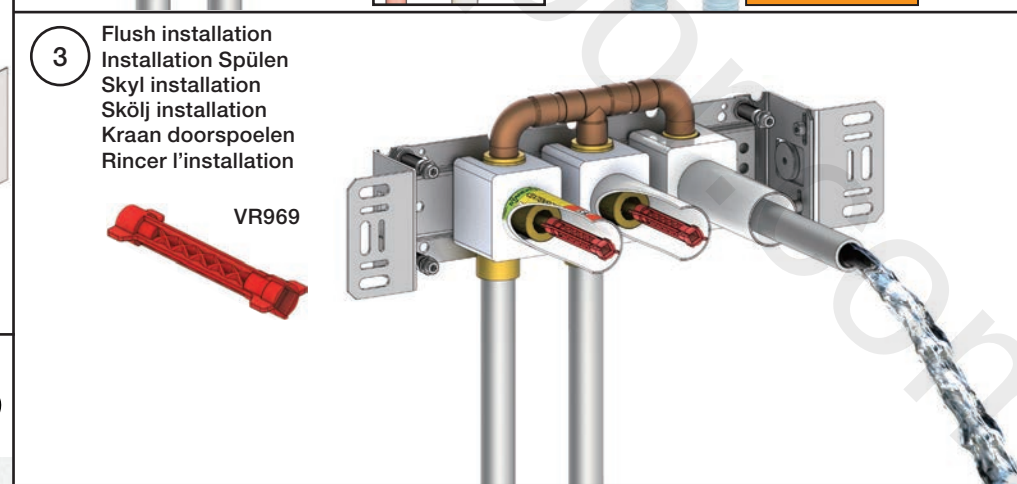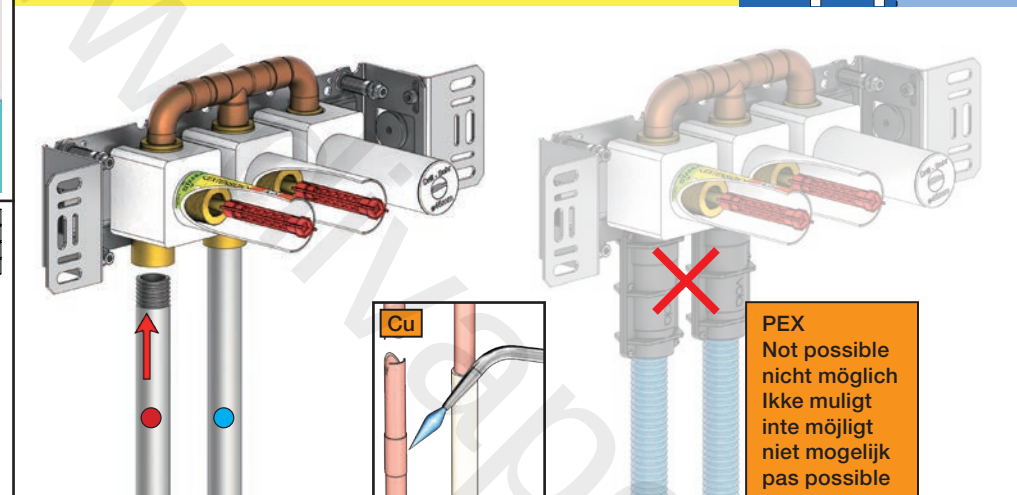

S21V

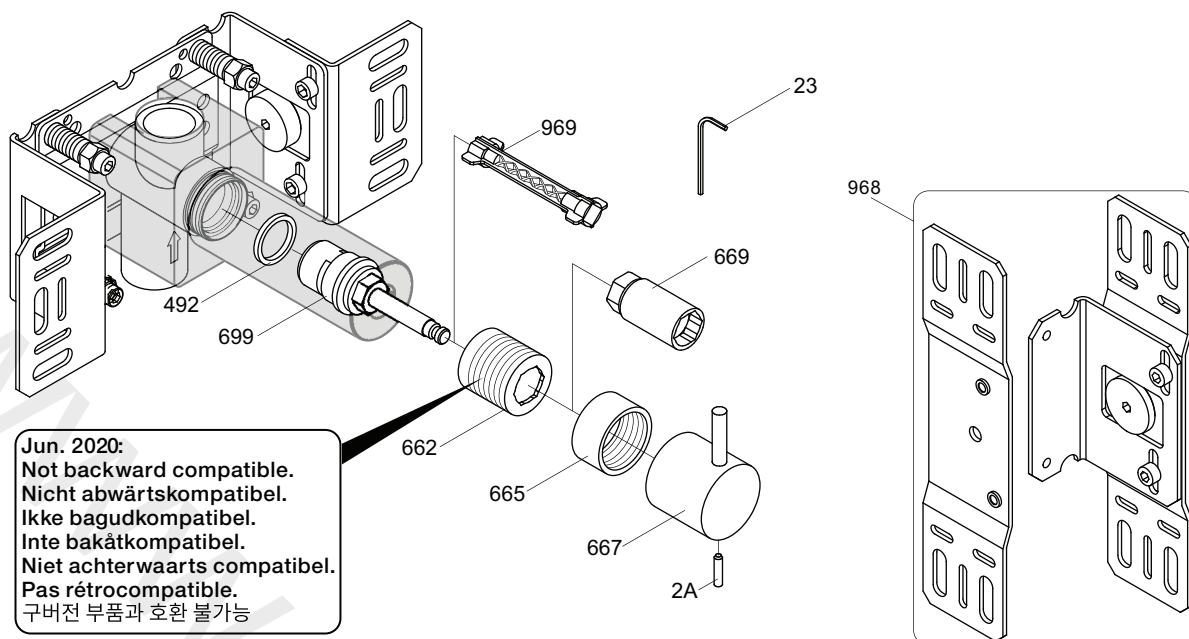

NR17: VR2A, VR23, VR665, VR667
 VR699K: VR23, VR492, VR669, VR699
 VR699K+: VR23, VR492, VR662+, VR669, VR699+

S21V 2928	S42V 2700V 2927	2600 2800V 2926	2900 2927
-	1034	003K	002
001G	2 x 001G	001, 2 x 001G	001, 001G
voila Lunavej 2 DK-8700 Horsens Tlf : + 45 7023 5500 sales@vola.com www.vola.com			Date May. 22 Rev. 3 Sheet SB 58
VOLA 2600 2700V, 2800V, 2900 S21V, S42V			