


Fitting instruction	Monteringsvägledning
Montageanleitung	Montage hanleiding
Monteringsvejledning	Manuel de montage

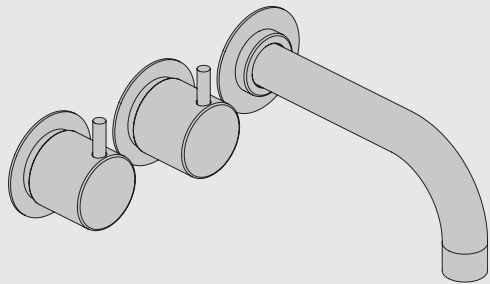



www.vola.com

2600_V4 40998509
17-08-2022

vola



 vola.com 	L	L1	L2	H	H1	D
S21V	276 mm 10 7/8"	160 mm 6 1/4"	168 mm 6 5/8"	95 mm 3 3/4"	186 mm 7 3/8"	70 mm 2 3/4"
S42V, 2700V, 2900	377 mm 14 3/4"	264 mm 10"	268 mm 10"			
2600	475 mm 18 3/4"	359 mm 14"	367 mm 14 1/2"			
2800V	552 mm 21 3/4"	439 mm 17"	447 mm 17 5/8"			

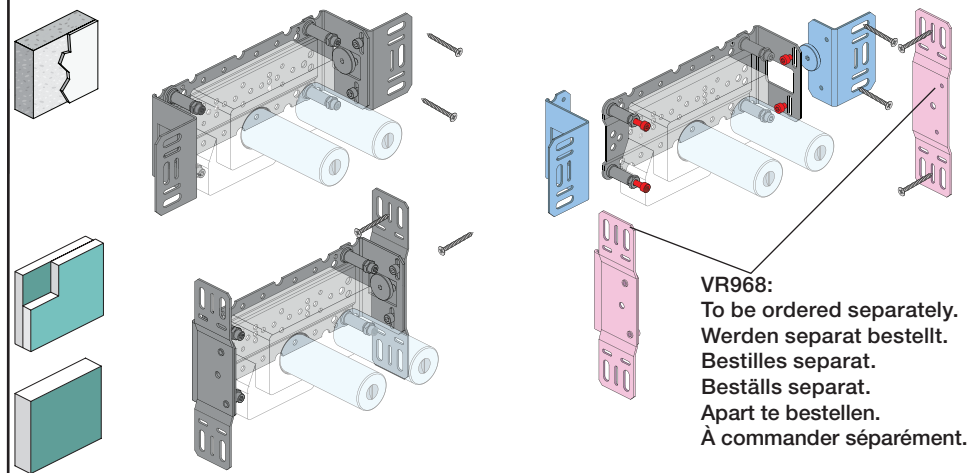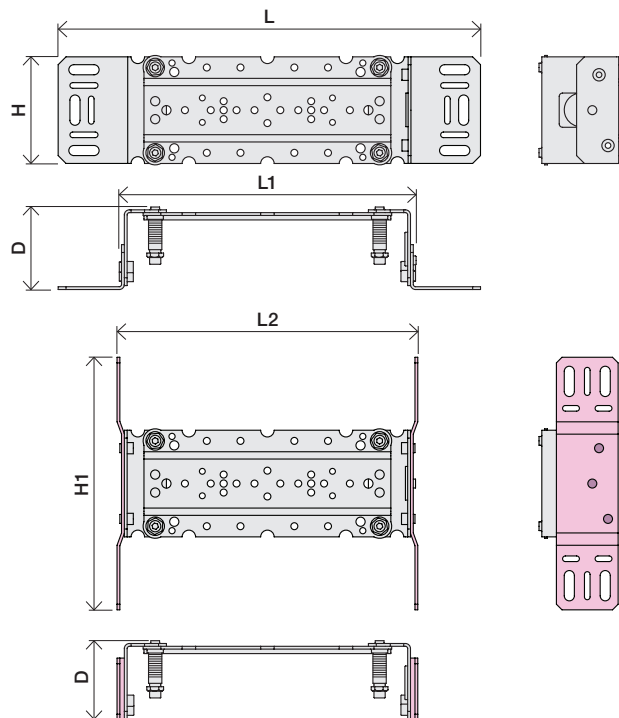


VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.

A Max.: 10 Bar/145 psi
Max. 65°C, 150°F
Data, l/min. / (Gpm) 3 Bar/43.5 Psi:

B Check the local legislation.
 Bitte die örtlichen Vorschriften überprüfen.
 Tjek de lokale regler.
 Kontrollera lokala föreskrifter
 Nazittien lokale regelgeving.
 Vérifiez la législation locale.



**!DO NOT!
!REMOVE!**




  DE:
Bitte separat beiliegende Anleitung für die Schallentkopplung
VR972 beachten






 Box till inbyggnadsblandare.
 Boks til indbygningsblander.
 Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.


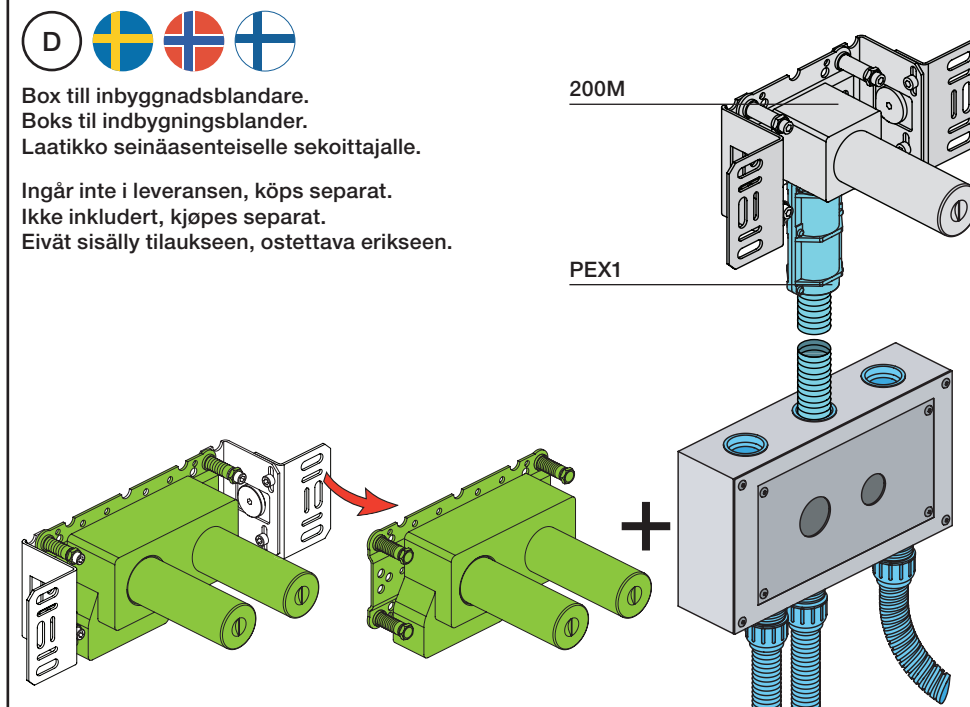


- Extension
- Verlängerung
- Forlængerdele
- Förlängning
- Aanpassing
- Modification

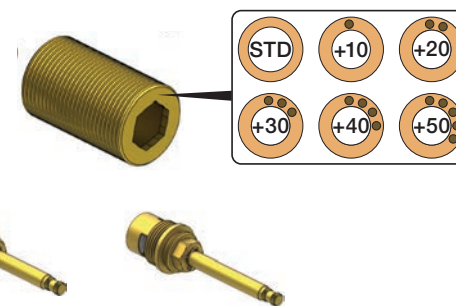

T Min. 3 mm
Max 65 mm



Y Min. 48 mm
Max. 110 mm

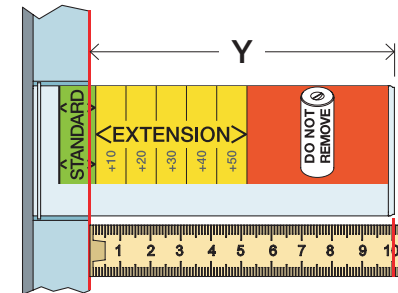

- Extension, retrofit
- Verlängerung, nachträglicher Einbau
- Forlængerdele, eftermontering
- Förlängning, eftermontering
- Aanpassing na montage
- Modification après installation

X₅₂ - 0 mm

X_{-15 - 0 mm}



	T	Y	VR699/VR2019		X	VR699/VR2019
	5 - 15 mm	110 - 98 mm	Std.		40 - 52 mm	Std.
	15 - 25 mm	98 - 88 mm	+10		30 - 40 mm	+10
	25 - 35 mm	88 - 78 mm	+20		20 - 30 mm	+20
	35 - 45 mm	78 - 68 mm	+30		10 - 20 mm	+30
	45 - 55 mm	68 - 58 mm	+40		0 - 10 mm	+40
	55 - 65 mm	58 - 48 mm	+50		-10 - 0 mm	+50



Fitting of extension
Montage von verlängerung





Montering af forlængerdele
Montering av förlängning

Montage van de verlengstukken
Montage des rallonges








VR699+

VR2019+, VR2119+

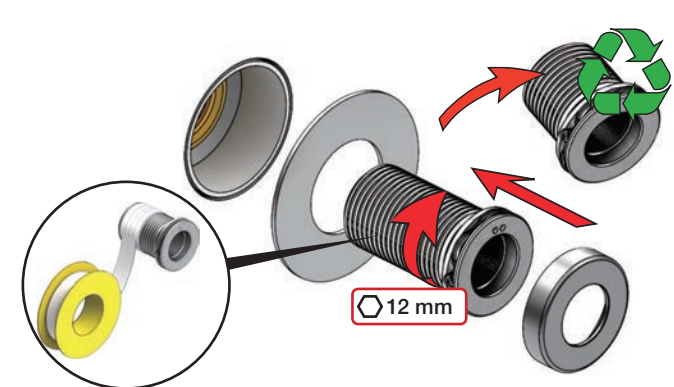
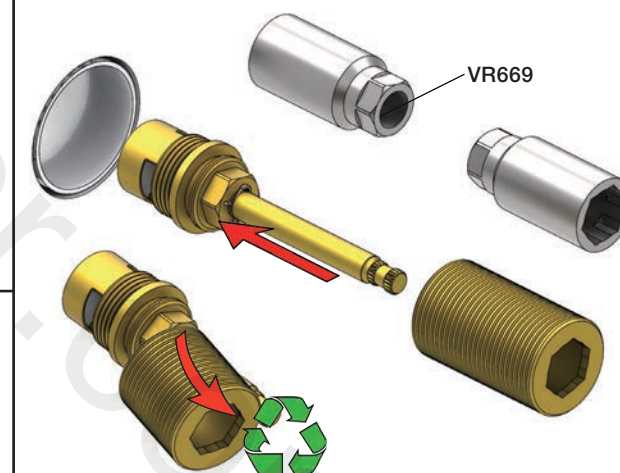


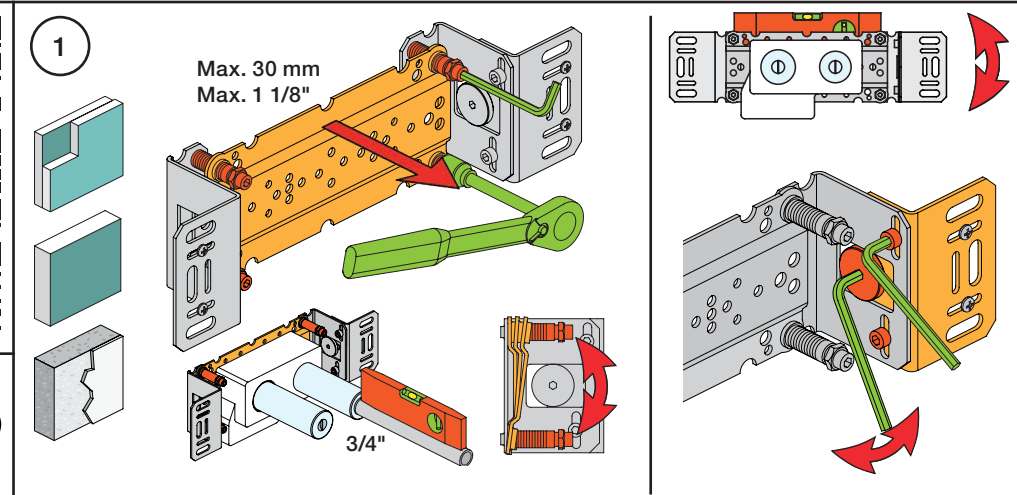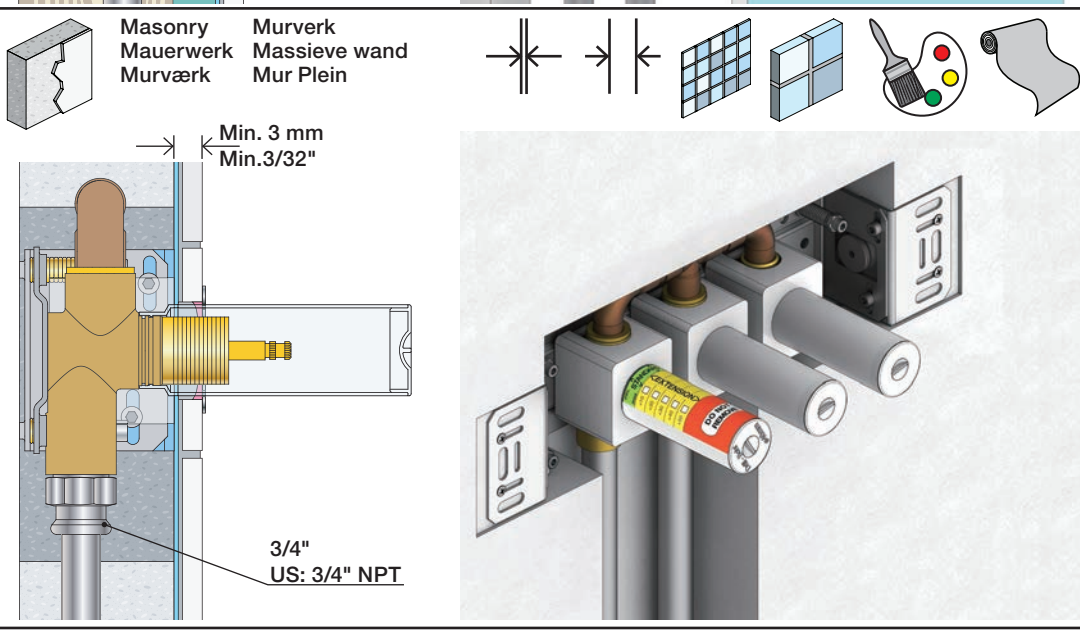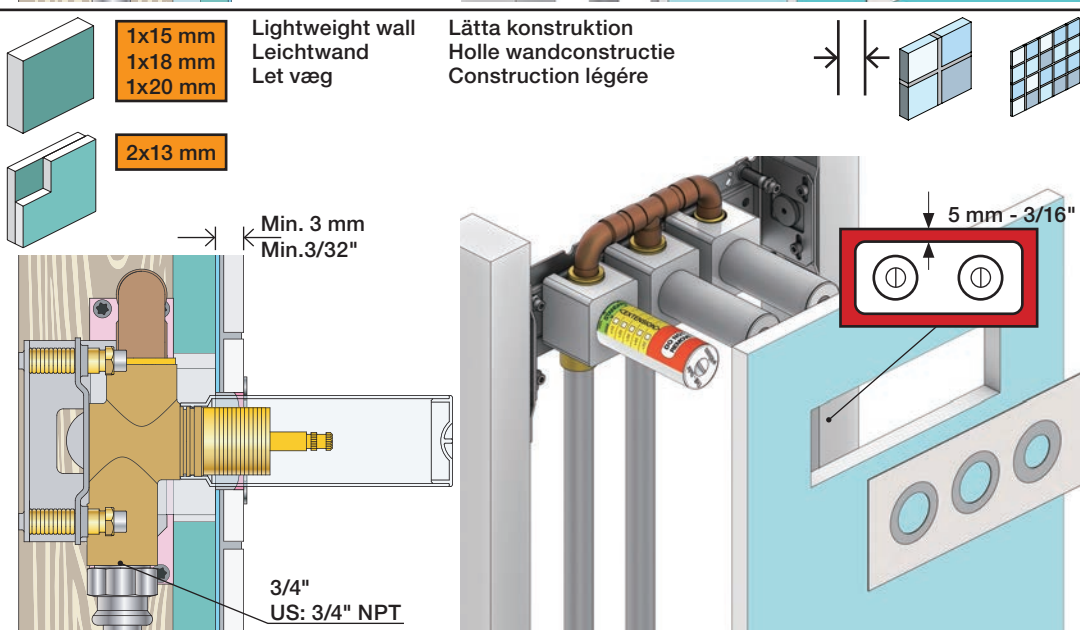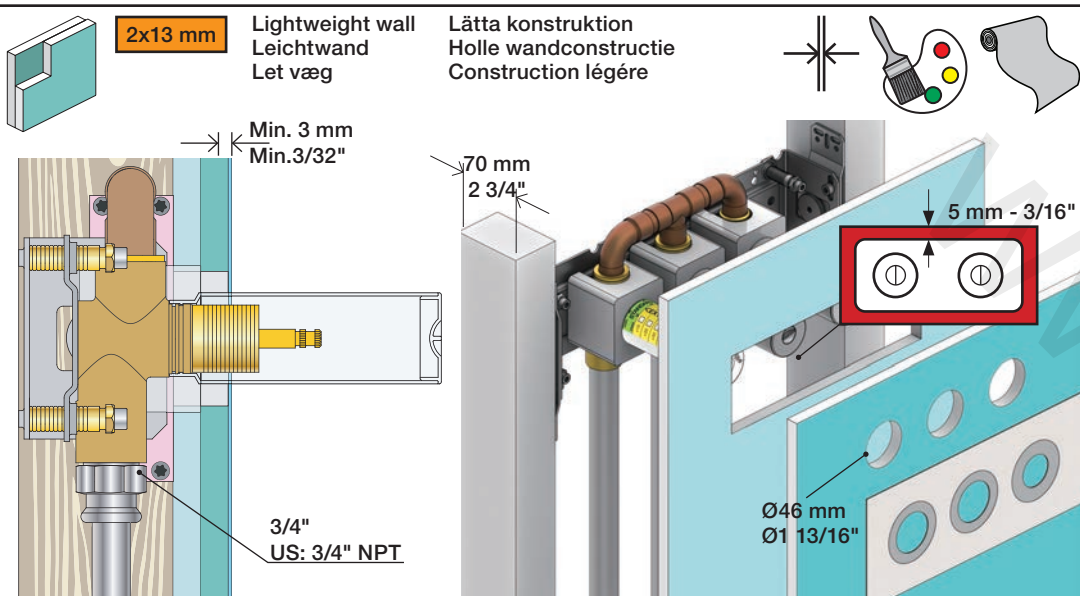





2 Test Pressure Prüfdruck testtryk Test tryck Test druk test de pression
Check the local legislation. Bitte die örtlichen Vorschriften überprüfen. Tjek de lokale regler. Kontrollera lokala föreskrifter. Nazitten lokale regelgeving. Vérifiez la législation locale.
! Water - Wasser - Vand - Vatten - Water - L'eau ! MAX 1 Minute - Minut - Minuut !

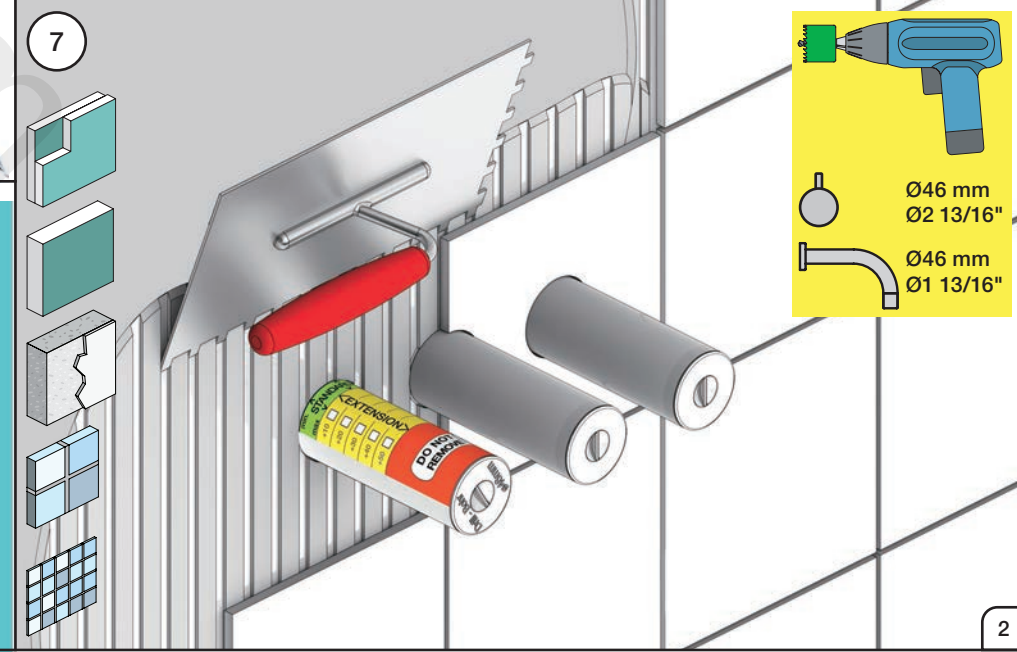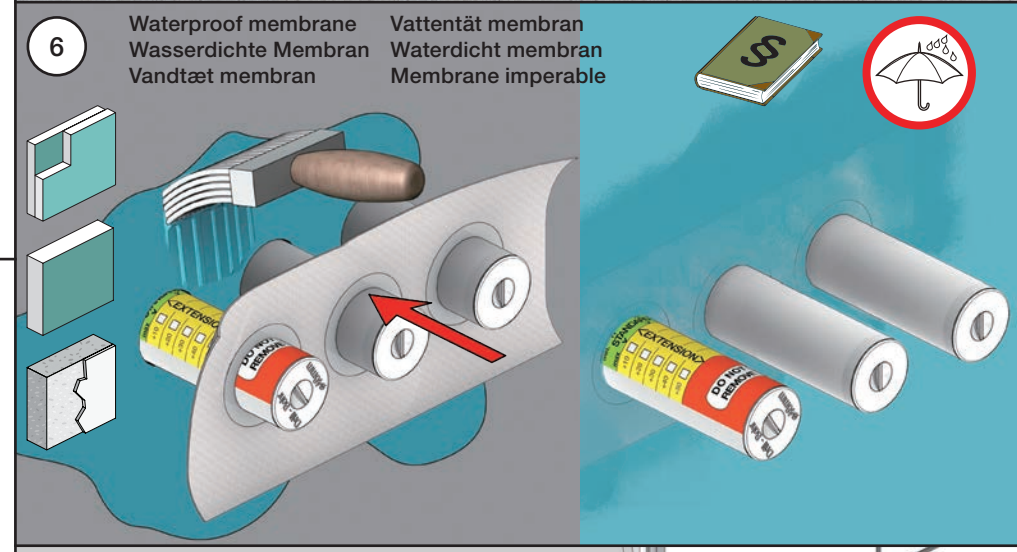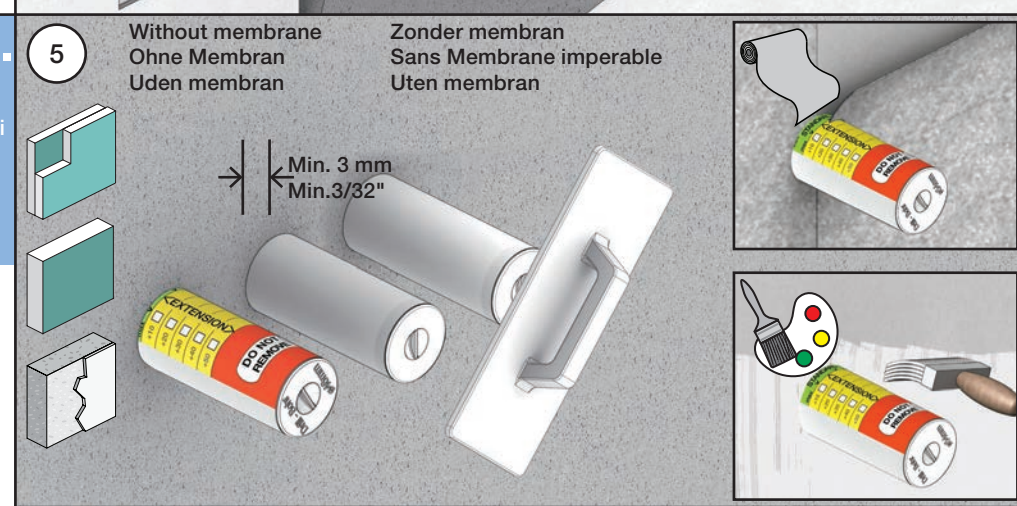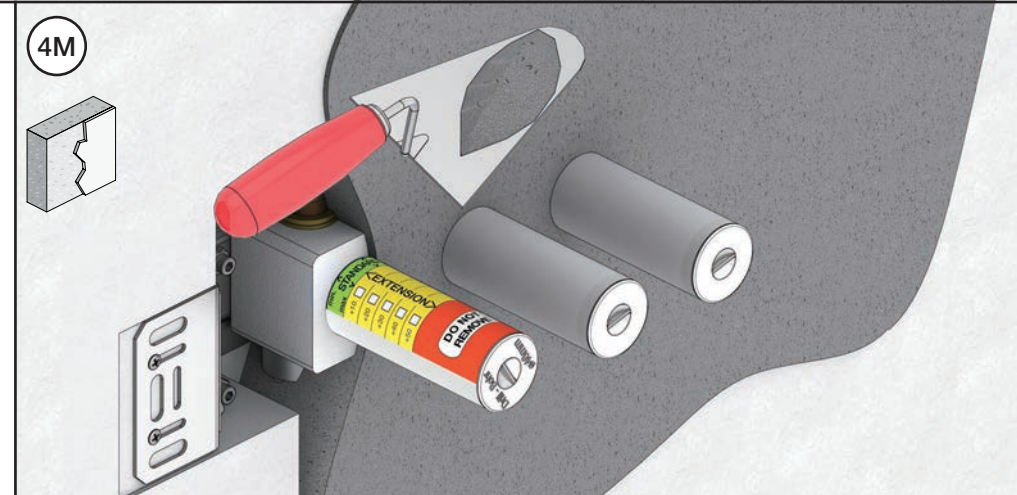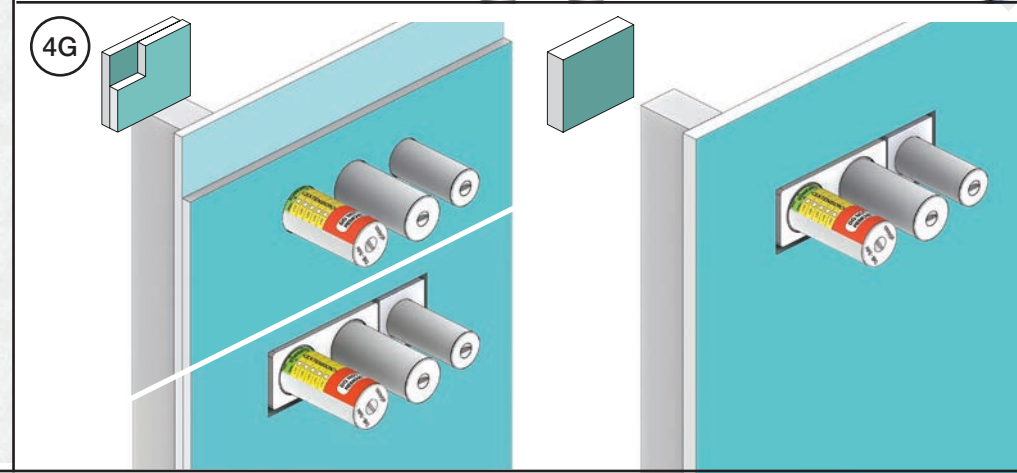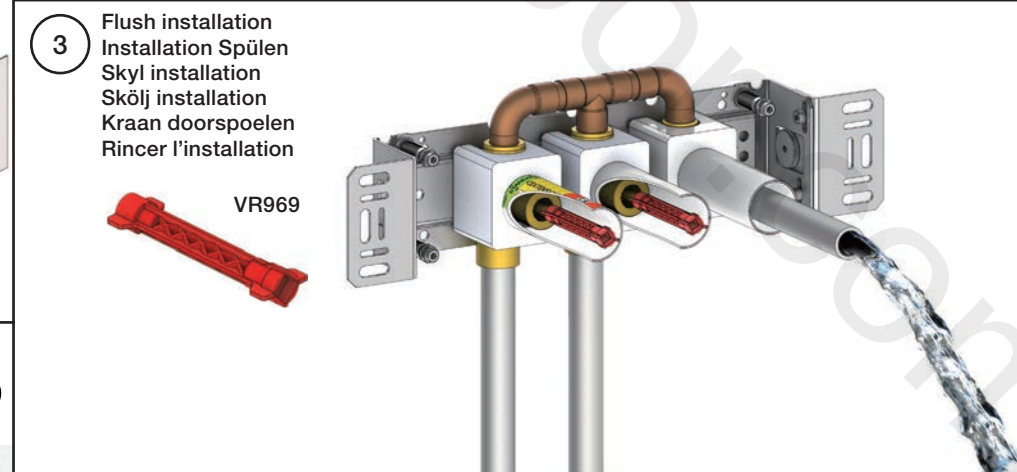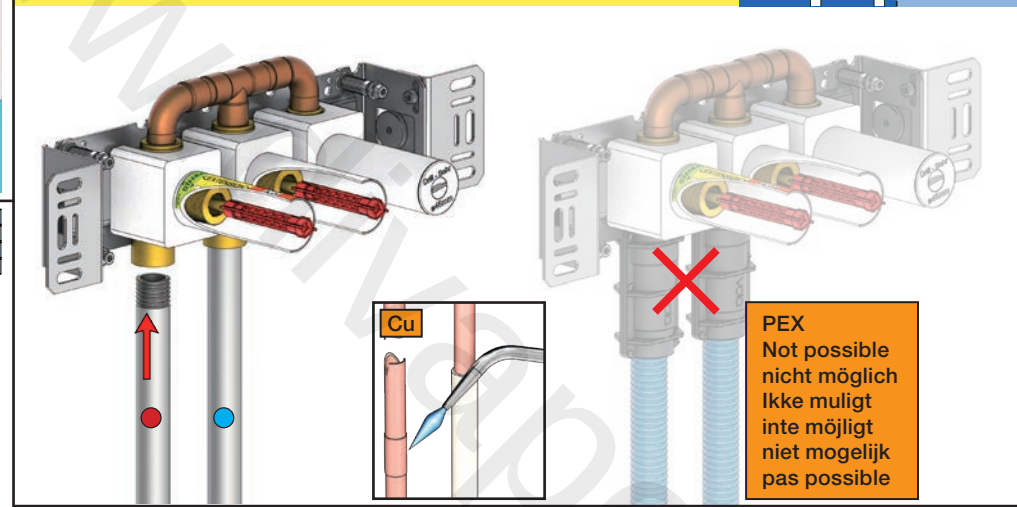

S21V

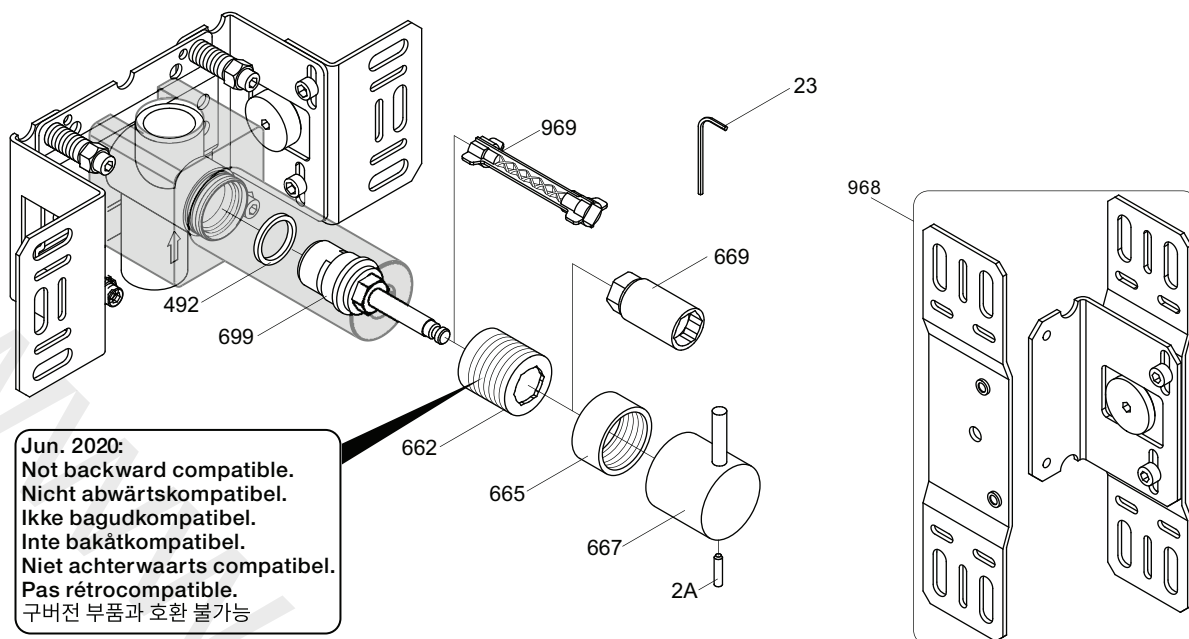

NR17: VR2A, VR23, VR665, VR667
 VR699K: VR23, VR492, VR669, VR699
 VR699K+: VR23, VR492, VR662+, VR669, VR699+

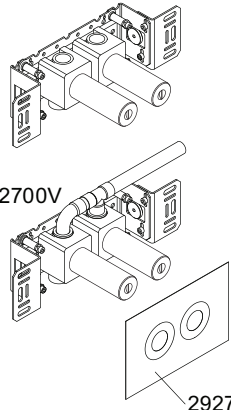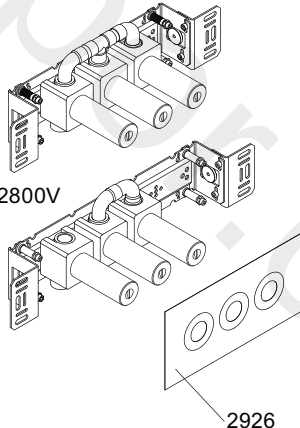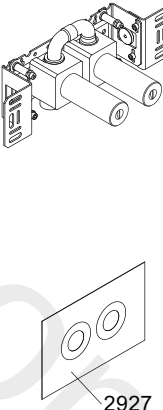S21V  2928	S42V  2700V 2927	2600  2800V 2926	2900  2927	
-	 1034	 003K	 002	
 001G	 2 x 001G	 001, 2 x 001G	 001, 001G	
 vola Lunavej 2 DK-8700 Horsens Tlf : + 45 7023 5500 sales@vola.com www.vola.com		VOLA 2600 2700V, 2800V, 2900 S21V, S42V		Date May. 22 Rev. 3 Sheet SB 58