

SAI 3HBF C

SAIL Tap Range Sail 3 Hole Bath Filler Chrome




Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Minimum working pressure of 2.0 bar

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Product Type:	Traditional
Main Construction Material:	Brass
Mount Type:	Deck Mounted
Handle Type:	Lever Handles
Connection Inlet:	½" BSP
Connection Outlet:	Open
Number of Tap Holes:	3
Valve/Cartridge Type:	40mm Cartridge
Plumbing System Requirements:	All - Ideally Balanced
Minimum Dynamic Pressure:	2.0 Bar
Maximum Dynamic Pressure:	5.0 Bar
Maximum Hot Water Temperature: °C	60
Maximum Static Pressure: (bar)	10
Flow Type:	Single Flow
Isolation Included:	No

Dimensions (measurements in mm)

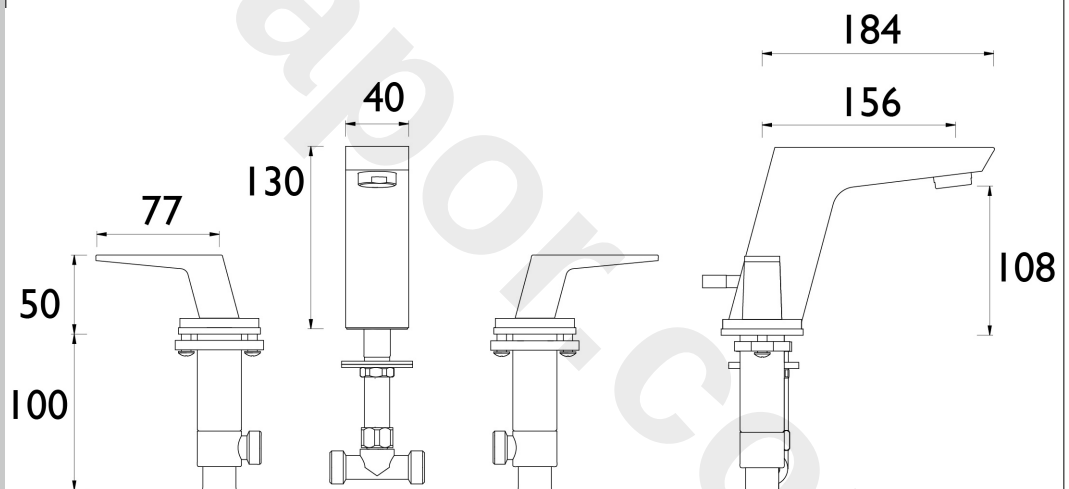

Flow Rates (l/min)

System Pressure (bar)	2	3	5
SAI 3HBF C	19	23.4	30.4

TECHNICAL
DATA
SHEET



BRISTAN

D3