SDCDUAL03 Dawlish Concealed Valve with Twin Integral Stopcocks Deluxe Fixed Head and Flexible Kit Chrome



		- 4		 _	_
-	ea	т		_	
	$-\epsilon$		L DI	-	P 7


- Optimised for UK market, designed to work at pressure range of 0.2 - 5.0 bar
- Thermostatic temperature control and automatic stop prevent surges of hot or cold water
- Performance Flow to provide a drenching
- Smallest recessed valve on the market, will fit into a 35mm cavity space
- Large 6" shower rose
- Ceramic disc for smooth operation and added durability
- Recessed

Product Certifications:



Additional Information:

Specification						
Main Construction Material:	Brass					
No of Controls:	3					
Shower Type:	Recessed Thermostatic Shower					
Shower Head Type:	Traditional Rose and Traditional Deluxe Handsets					
Handle Type:	Crosshead					
Valve/Cartridge Type:	Thermostatic Cartridge					
Maximum Hot Water Supply Temperature °C:	65					
Maximum Static Pressure: (bar)	10					
Plumbing System Suitability:	All - Ideally Balanced					
Working Pressure Range:	Min. 0.2 Bar, Max. 5.0 Bar					
Connection Inlet:	15mm Compression					
Connection Outlet:	15mm Compression & G 1/2"					
Isolation Valve Included:	No					
Check Valve Included:	Yes					

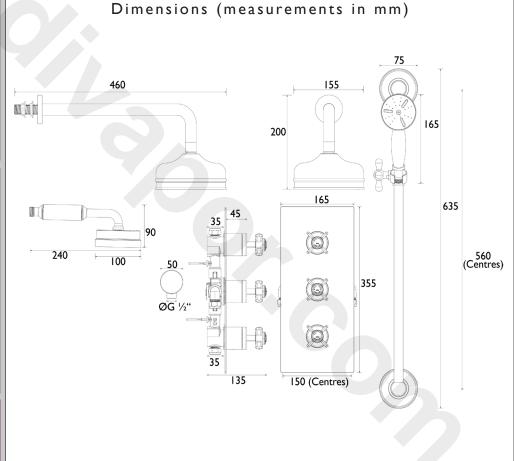

Flow Rates (I/min)										
System Pressure (bar)	0.2	0.5	1	2	3	5				
Through Handset (mixed)		14.2	20.7	29.2	35.8	46.2				

TECHNICAL DATA SHEET YEAR



