SDCDUAL09

DAWLISH Shower Range Dawlish Exposed Thermostatic Dual Control Shower Valve with Premium Flexible Riser Kit





	4		
 ea	TII	ro	(de
Сa	uu		PP

- Optimised for UK market, designed to work at pressure range of 0.2 - 5.0bar
- Performance Flow to provide a drenching experience
- Adjustable inlet centres, allowing you to use existing pipework with centres measuring anything between 136mm and 158mm.
- Premium handset
- Exposed

Product Certifications:




Additional Information:

- Available in Chrome or Vintage Gold
- Matching taps are available for the Dawlish range, search Taps on our website to see the complete collection.

Specification					
Main Construction Material:	Brass				
No of Controls:	2				
Shower Type:	Mixer				
Shower Head Type:	Handset				
Valve/Cartridge Type:	Thermostatic				
Maximum Hot Water Supply Temperature °C:	65				
Maximum Static Pressure: (bar)	10				
Plumbing System Suitability:	Suitable for all plumbing conditions				
Working Pressure Range:	Min: 0.2 Max: 5.0				
Connection Inlet:	1/2"				
Connection Outlet:	1/2"				
Isolation Valve Included:	No				
Check Valve Included:	Yes				

Dimensions (measurements in mm)

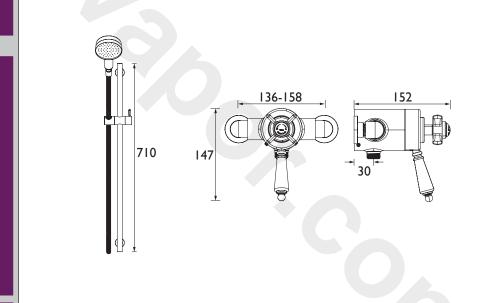

Flow Rates (I/min)									
System Pressure (bar)		0.5	1	2	3	5			
Through Handset with Flow regulators (mixed)		5.6	7.4	7.6	7.7	8.5			
Through Handset with no Flow regulators (mixed)		9.0	13.5	19.8	25.1	-			

TECHNICAL DATA SHEET



