



Features:

- Optimised for UK market, designed to work at pressure range of 0.1 - 5.0 bar
- Thermostatic temperature control and automatic stop prevent surges of hot or cold water
- Eco-friendly to save as much water as possible
- Adjustable inlet centres, allowing you to use existing pipework with centres measuring anything between 110mm and 155mm.
- Petite 5" shower rose
- Exposed

Product Certifications:




Additional Information:

Specification

| | |
|--|-----------------------------|
| Main Construction Material: | Brass |
| No of Controls: | 2 |
| Shower Type: | Exposed Thermostatic Shower |
| Shower Head Type: | 5" Shower Rose |
| Handle Type: | Crosshead |
| Valve/Cartridge Type: | Thermostatic Cartridge |
| Maximum Hot Water Supply Temperature °C: | 65 |
| Maximum Static Pressure: (bar) | 10 |
| Plumbing System Suitability: | All - Ideally Balanced |
| Working Pressure Range: | Min. 0.2 Bar, Max. 5.0 Bar |
| Connection Inlet: | 15mm Compression |
| Connection Outlet: | 15mm Compression |
| Isolation Valve Included: | No |
| Check Valve Included: | Yes |

Dimensions (measurements in mm)

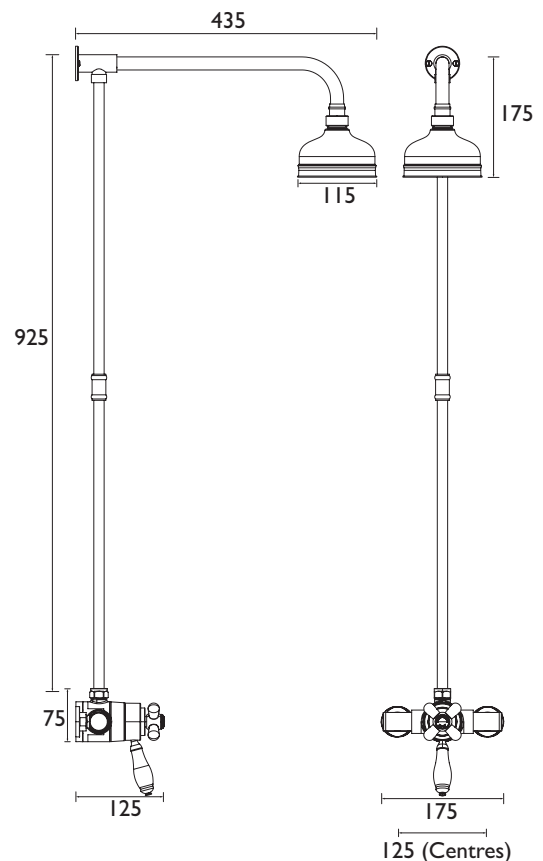

Flow Rates (l/min)

| System Pressure (bar) | 0.2 | 0.5 | 1 | 2 | 3 | 5 |
|-------------------------|-----|-----|-----|-----|-----|-----|
| Through Handset (mixed) | | | 5.3 | 7.7 | 8.5 | 8.7 |