



Features:

- Compatible with low pressure water systems, optimised for UK market
- Available in chrome and vintage gold
- Available in a selection of finishes

Product Certifications:




164.6l/min

Additional Information:

Specification

Product Type:	Traditional
Main Construction Material:	Brass
Mount Type:	Deck Mounted
Handle Type:	Crosshead Handles
Connection Inlet:	G 3/4" BSP
Connection Outlet:	Open
Number of Tap Holes:	2
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2 bar
Maximum Dynamic Pressure (bar):	5.0 bar
Maximum Hot Water Temperature °C:	60°C
Maximum Static Pressure (bar):	10 bar
Flow Type:	Single Flow
Isolation Included:	No

Dimensions (measurements in mm)

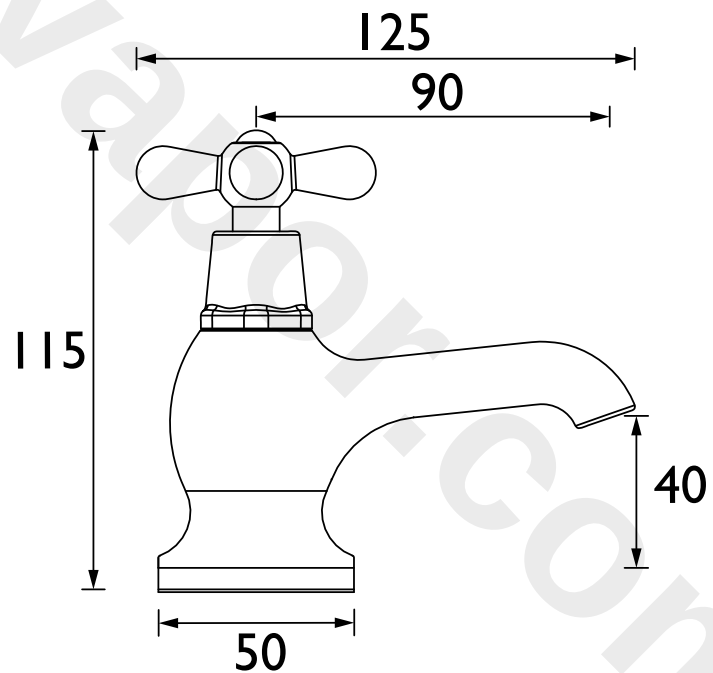

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
TRHG01 (Cold)	21.56	34.22	47.50	67	82.2	106
TRHG01 (Hot)	21.6	34.02	47.58	67.2	82.4	106.3