

DI VAPOR

S-BB004 THE MAYFAIR

PRE-INSTALLATION & DELIVERY GUIDE

Thank you for your interest in the Mayfair Steam Shower. It is important that the following guidelines are carefully followed for successful installation.

ASSEMBLY

ATTENTION: The Mayfair is free-standing and should not be built-in. This allows for quick access to the services and easier fitting.

DELIVERY INFORMATION

This unit will be delivered in 2 wooden crates. To include packaging please expect:

- BOX 1** DIMENSIONS = 136cm x 96cm x 74cm
- BOX 2** DIMENSIONS = 167cm x 83cm x 53cm
- BOX 3** DIMENSIONS = 167cm x 132cm x 32cm

COMBINED WEIGHT = 215KGS

ELECTRICALS

- Electrical supply should be wired from a 16 amp I.P. 56 socket directly back to the consumer box.
- When connecting an external telephone line from BT broadband please ensure you use the appropriate DSL filter.
- *Caution: The length of the cable connecting to the CD source may effect the quality of the sound.*

PLUMBING

- Both Hot & Cold water supplies must be of high pressure. The unit requires a supply pressure of 2.5-3.0 bar, typically provided by a:
 1. Combi Boiler,
 2. Pressurised Pump, or
 3. Pressurised Cylinder.
- Pipework must be recessed to allow the finished unit to sit flush against the wall.
- Use full bore water lever ball valves for the hot and cold supply. See Figure 3.
- The shower trap comes pre-connected with a flexible waste hose. This flexible hose should be connected to the rooms built-in waste pipe and exit as shown in Figure 2.

TILING


- Prior to installation it is recommended to tile both behind and below the unit, including a clearance around the unit to avoid "building in" and the unnecessary moving of the installed steam shower. See Figure 4.

NOTE: LAMINATE, VINYL & CARPET ARE NOT RECOMMENDED.

KEY

H	Hot Water Feed
C	Cold Water Feed
T	Telephone Connection
P	I.P 56 Socket

Figure 1

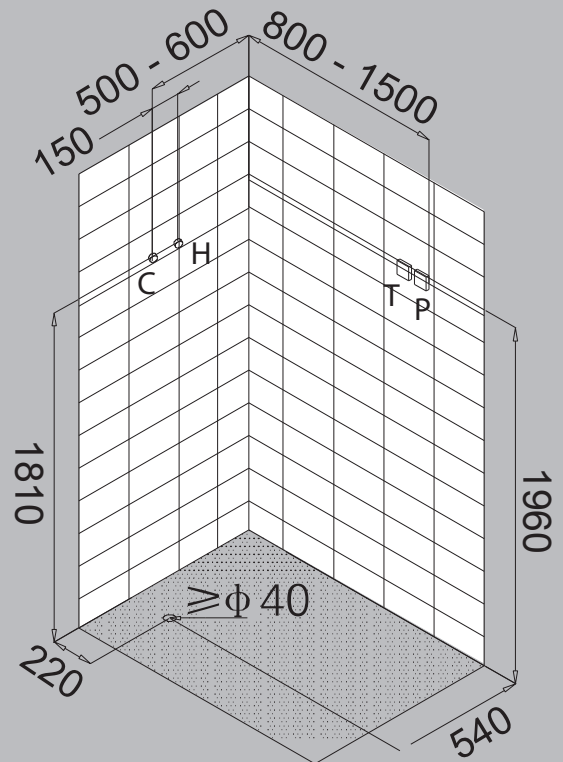

PLEASE ENSURE THAT WALLS AND FLOORS ARE LEVEL

Figure 2



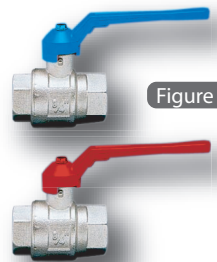


Figure 3

Figure 4

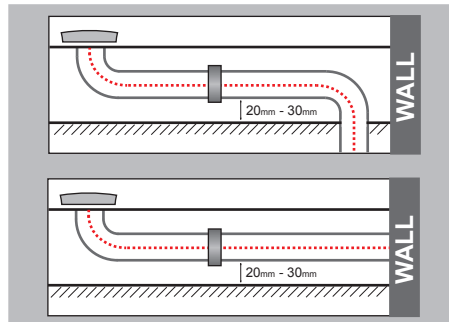

CE PO BOX 6496
SOLIHULL
WEST MIDLANDS
B91 2NY

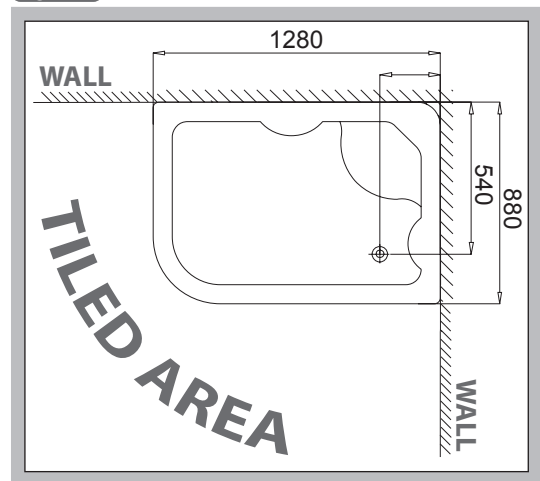

Tel: +44 (0) 8454 650 800
Fax: +44 (0) 121 685 2598