

ShowerTablet Select

Shower thermostat 300 for exposed installation 2 ticks

Finish: **Chrome** Article Number: **13177009**




Description

product features

- 1 function
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- thermostat cartridge, Start/stop valve to operate the functions
- maximum flow rate at 3 bar: 5,8 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- surface of the shelf at color variant -000 = mirror glass, at color variant -400 = white glass
- in case of installation on existing G 3/4 connections, adaptor no.02026000 must be used
- Safety stop at 40 °C
- temperature limitation adjustable
- with isolated water conduction
- non-return valve
- with silencer
- shelf made of safety glass
- material handles: metal
- centre distance: 150 ± 12 mm
- connection dimension: DN15
- connection type: G 1/2
- dirt filter included
- thermostat is delivered with button hand shower


Technology



Product image



Scale drawing

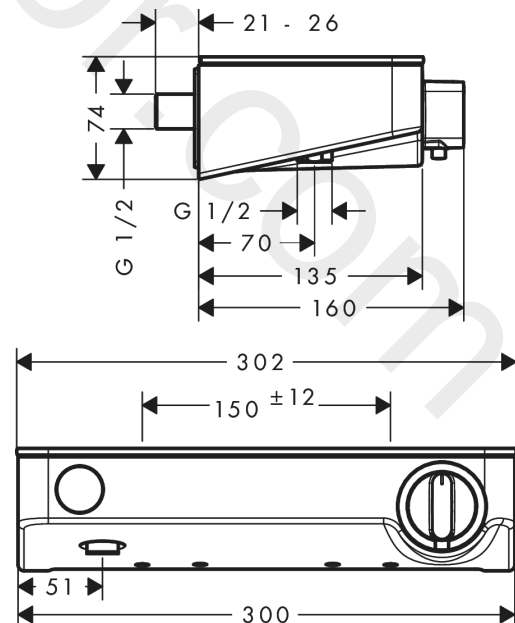

ShowerTablet Select
Shower thermostat 300 for exposed installation 2 ticks
Finish: **Chrome** Article Number: **13177009**



Flowchart




www.divapor.com

ShowerTablet Select
Shower thermostat 300 for exposed installation 2 ticks
 Finish: **Chrome** Article Number: **13177009**



Exploded Drawing

Year of production: >04/20

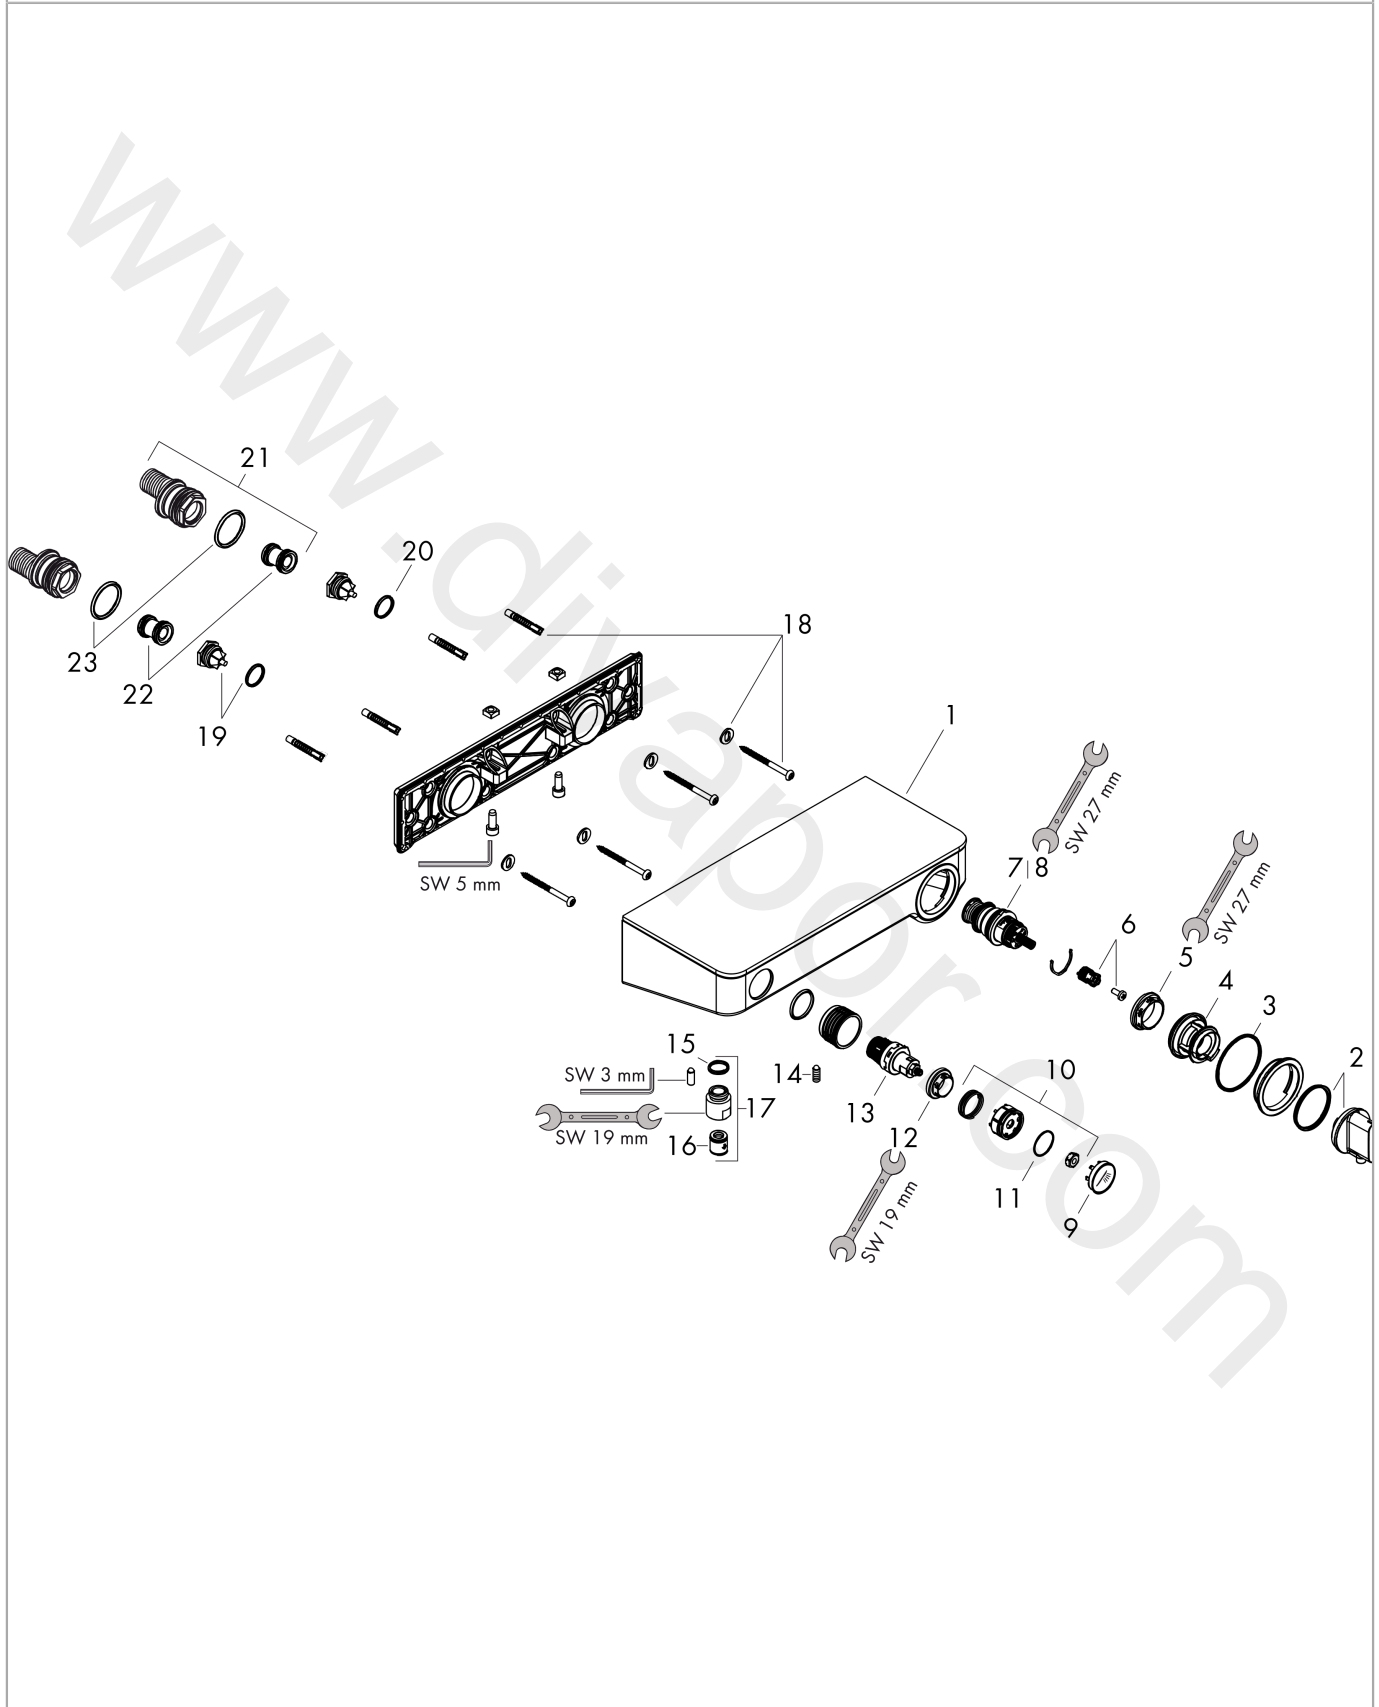

ShowerTablet Select
Shower thermostat 300 for exposed installation 2 ticks
 Finish: **Chrome** Article Number: **13177009**



Spare part list

Year of production: >04/20

Pos.	Description	Article Number	Price	PU
1	escutcheon	92162000	£ 370,00	1
2	handle for thermostat	98369000	£ 96,00	1
3	O-ring 49x2	98412000	-	1
4	safety set	98370000	£ 6,10	1
5	nut	98913000	£ 20,50	1
6	handle fixing set	92136000	£ 20,50	1
7	thermostat cartridge	98282000	£ 110,00	1
8	cartridge for exchanged connections	92373000	£ 275,00	1
9	set of symbols	98367000	£ 51,00	1
10	spring with sleeve	92340000	£ 13,30	1
11	O-ring 20x1	98140000	£ 3,30	1
12	nut	98368000	£ 13,30	1
13	shut off unit	95758000	£ 110,00	1
14	hollow set screw M6x16 including o-ring 29x3	98372000	£ 9,00	1
15	O-ring 14x2	98129000	£ 3,30	1
16	non return valve	92839000	£ 16,10	1
17	connecting thread	95392000	£ 20,50	1
18	mounting set	96179000	£ 13,30	1
19	non return valve (pressure-resistant up to 2 MPa)	95773000	£ 35,00	1
20	O-ring 17x2	98199000	£ 3,30	1
21	set of S-unions	95772000	£ 96,00	1
22	noise reduction	96429000	£ 6,10	1
23	O-ring 29x3	98371000	£ 6,10	1