

AR2 THBF C

ARTISAN Tap Range Artisan Thermostatic Bath Filler Chrome



Features:

- Thermostatic control for bath
- Dual control - flow and temperature are controlled separately
- Pre-set maximum temperature at 38°C can be overridden by the user
- Minimum working pressure of 0.5 bar
- Can be wall mounted using WMNT10 C

Product Certifications:



WRAS Cert. Number: 1912903
WRAS Expiry Date: 31/12/2024




For more products, visit our website:
<http://www.bristan.com>



Specification

Product Type:	Bathroom Taps
Main Construction Material:	Brass
Mount Type:	Deck Mounted
Handle Type:	Round Handles
Connection Inlet:	1/2"
Connection Outlet:	G3/4"
Number of Tap Holes:	1
Valve/Cartridge Type:	1/4 Turn 1/2" Ceramic Disc Valve
Plumbing System Requirements:	Suitable for balanced systems
Minimum Dynamic Pressure:	0.5 Bar
Maximum Dynamic Pressure:	5.0 Bar
Maximum Hot Water Temperature: °C	80
Maximum Static Pressure: (bar)	10
Flow Type:	Dual Flow
Isolation Included:	No

Dimensions (measurements in mm)

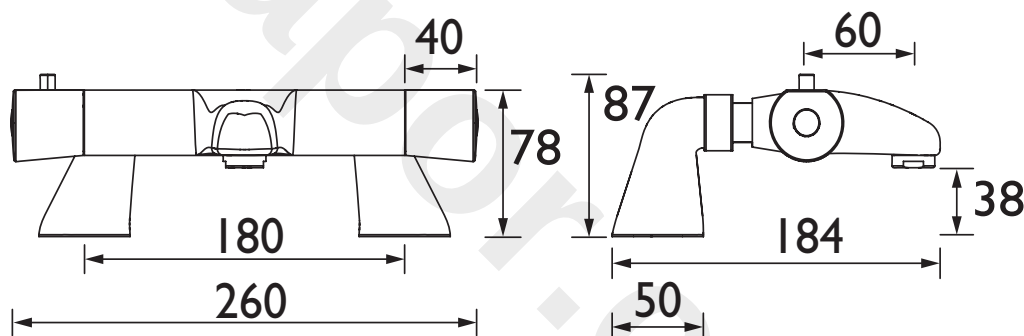

Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	5
AR2 THBF C	18.3	27	38.7	47.5	61

TECHNICAL
DATA
SHEET



BRISTAN

D6