

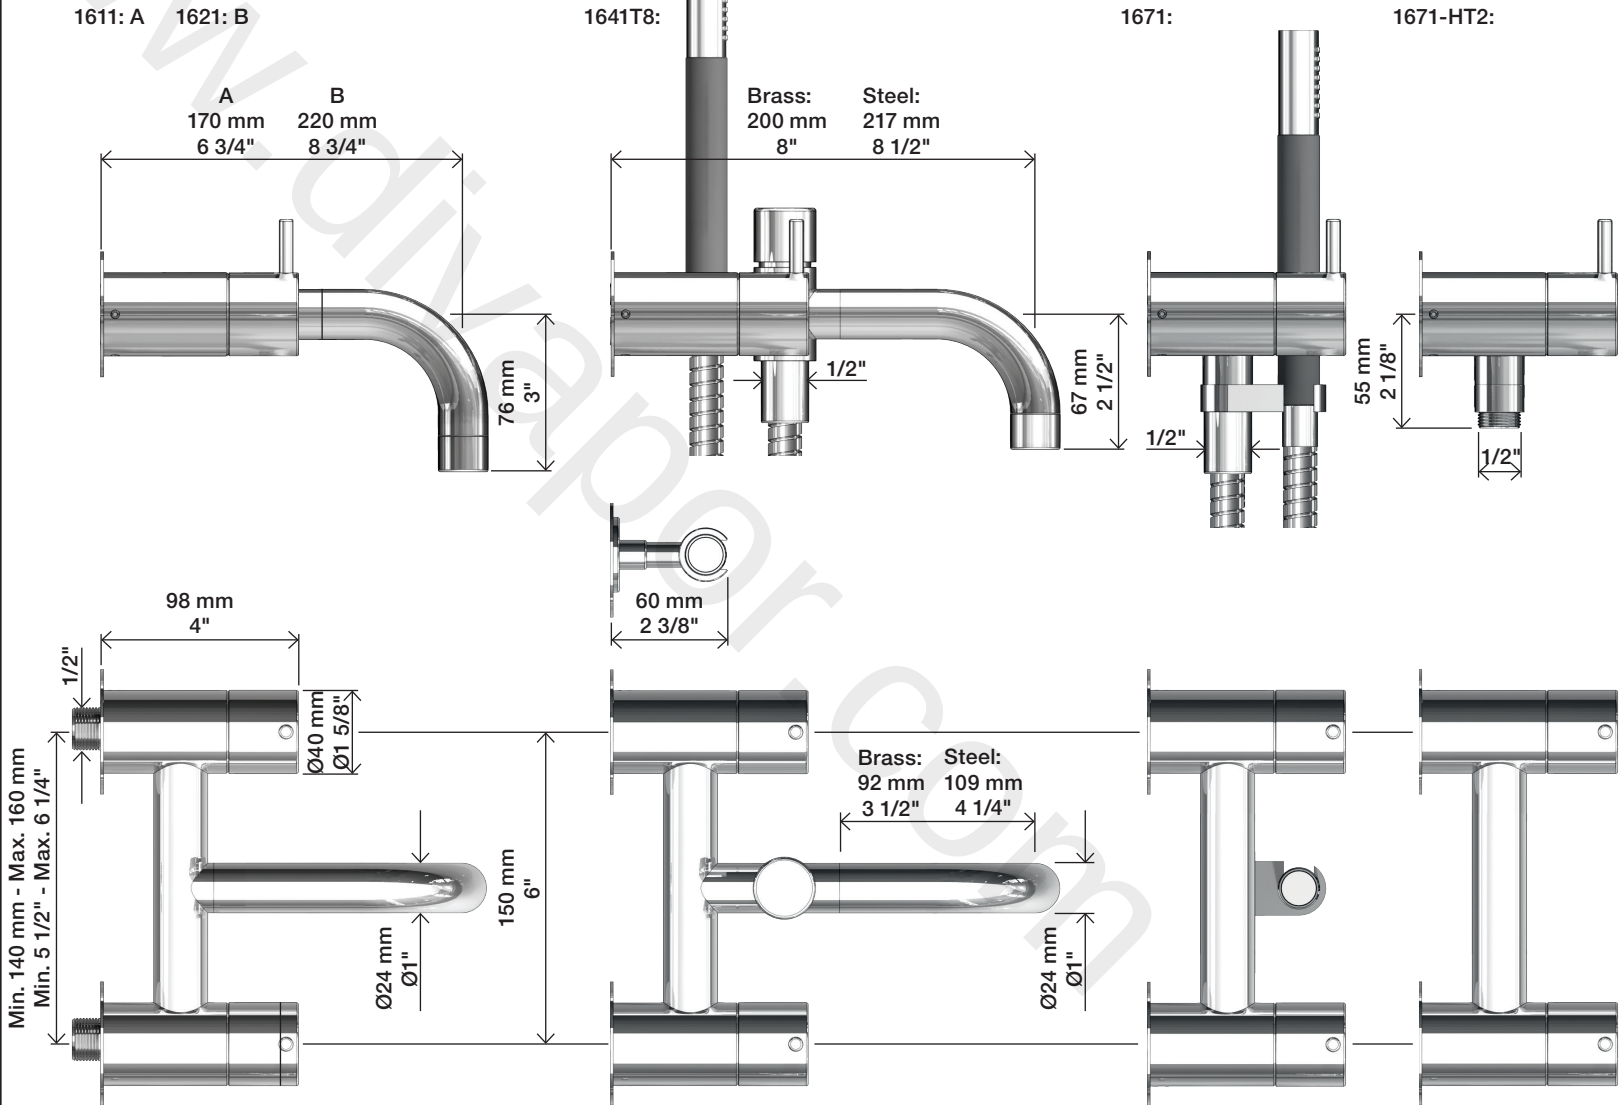
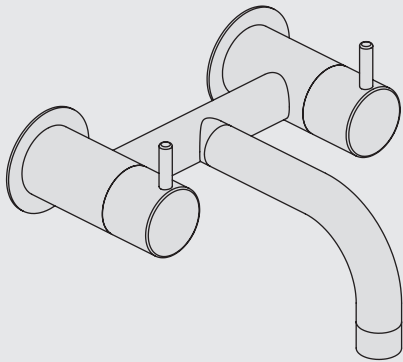
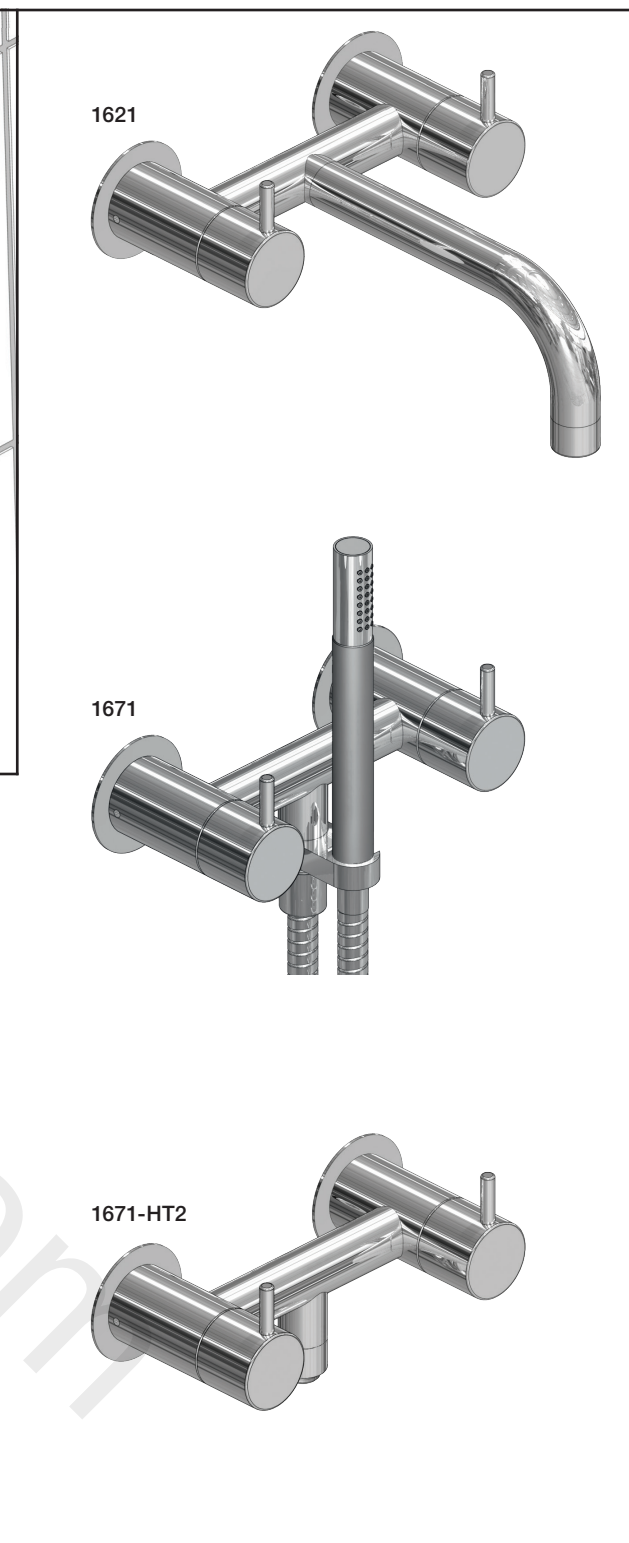
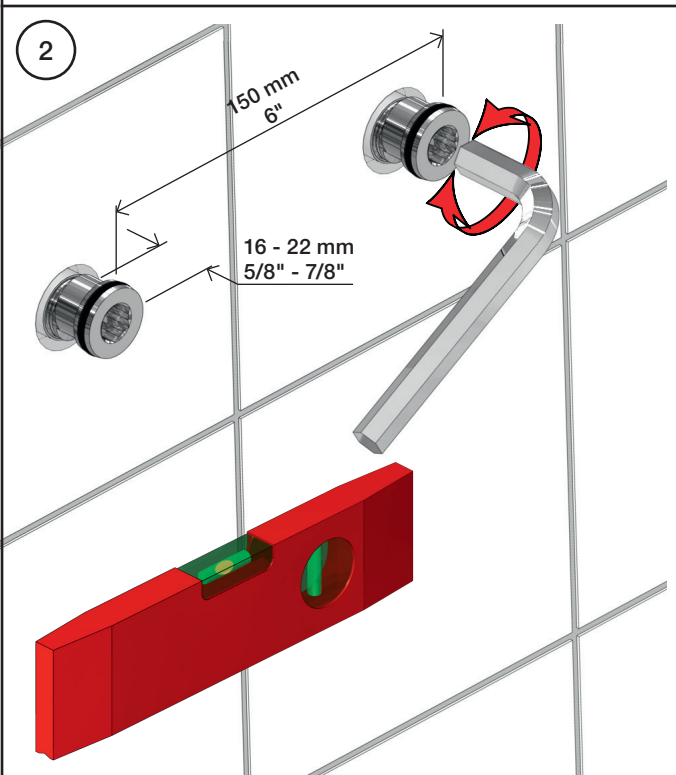



VOLA 1611, 1621, 1641T8
VOLA 1671, 1671-HT2

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage

Data	Bar:	1	2	3	4	5
1611/1621	l/min	13.4	18.9	23.2	26.8	30.0
	Gal/min	3.5	5.0	6.1	7.1	7.9
1641	l/min	11.4	16.2	19.8	22.9	25.6
	Gal/min	3.0	4.3	5.3	6.1	6.8
1641 - T2	l/min	6.6	9.4	11.5	13.3	14.8
	Gal/min	1.74	2.5	3.0	3.5	3.9
1671 - T2 1671-HT2	l/min	9.9	14.0	17.2	19.9	22.2
	Gal/min	2.6	3.7	4.5	5.3	5.9
 Max. 65°C. 150°F						

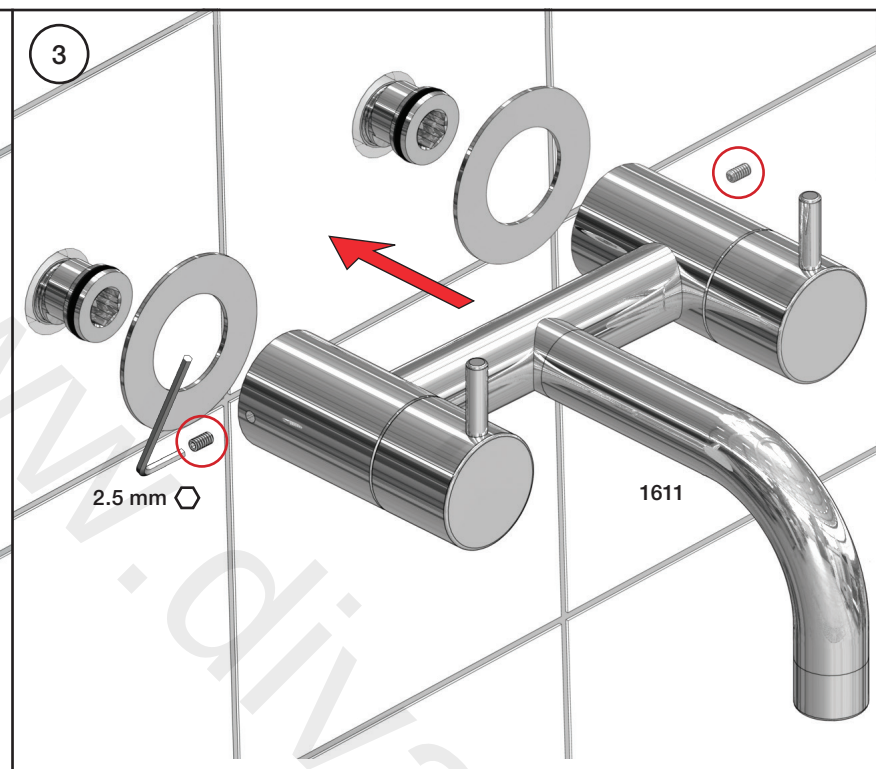

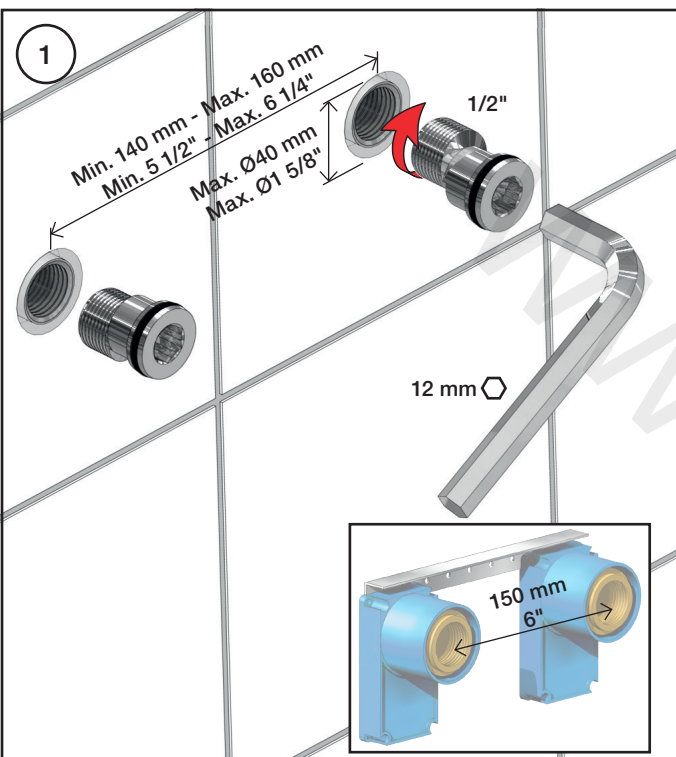

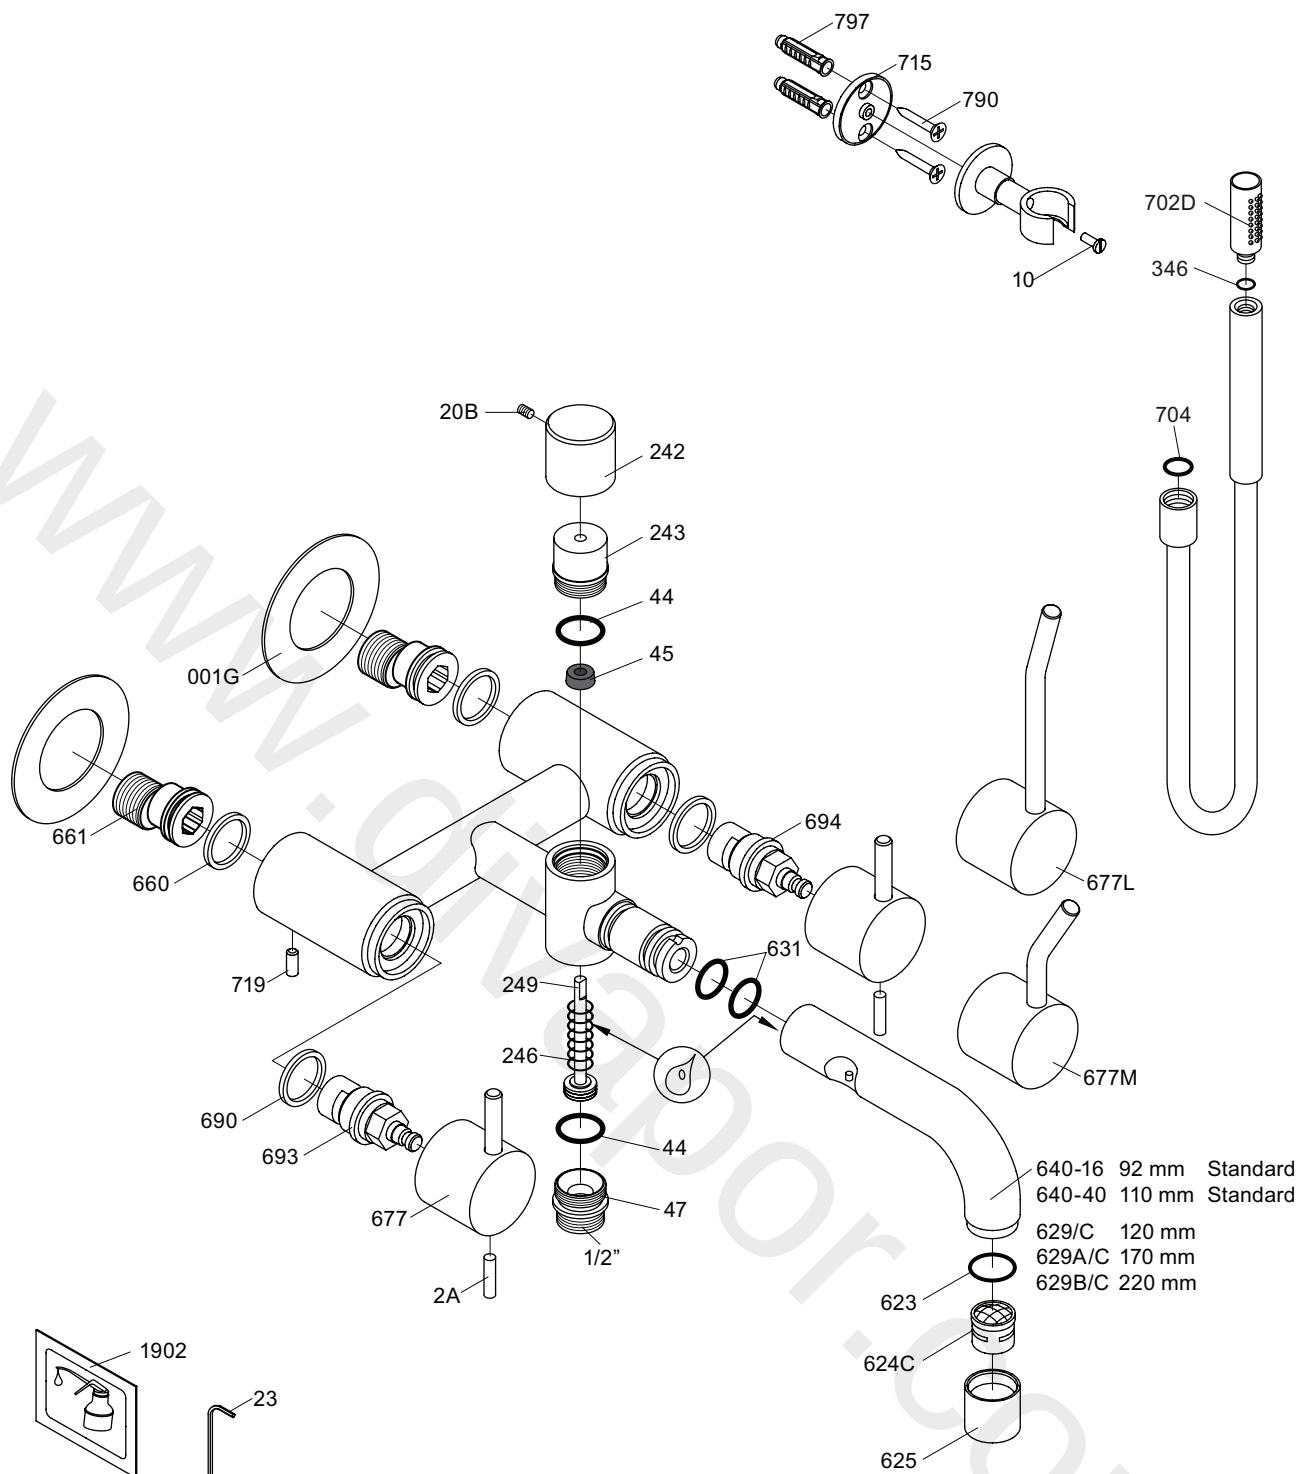

VR040D/: VR22, VR44, VR45, VR246, VR249, VR623, VR624/A/C/D/E/F, 2xVR631, VR1902
 VR1640: VR23, VR44, VR45, VR47, VR246, VR249, VR623, VR624/A/C/D/E/F, 2xVR631, VR1902



vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 1641T8

Date
 Jan. 96

Rev.
 2

Sheet
 SB 50A