


Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage

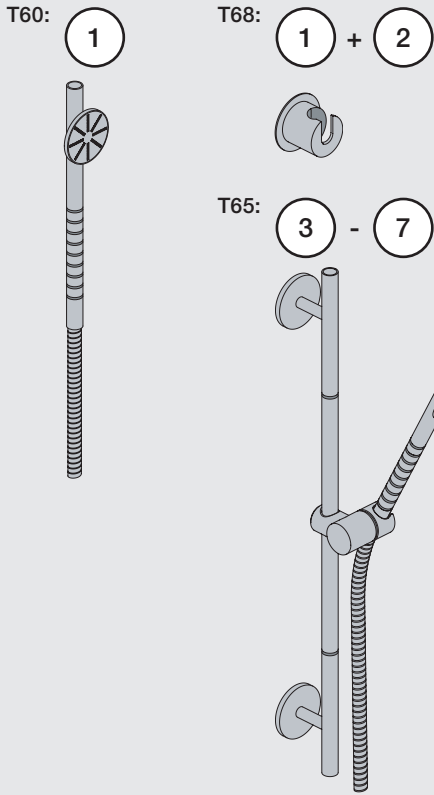

1 T60

28 mm
1 1/8"

55 mm
2 1/8"

Ø17 mm
Ø11/16"

290 mm
11 3/8"

1500 mm
5'

G1/2"

Data	Bar:	1	2	3	4	5
T60	(l/min) (Gal/min)	6.9 1.8	9.8 2.6	12 3.2	14 3.7	15 4.1
Max. 65°C. 150°F						

Service - VR556

2 T68

Ø43 mm
Ø1 3/4"

40 mm
1 5/8"

SILICONE

Ø6 mm
1/4"

25 mm
1"

001G

T8 → T68

Bathtub
Badewanne

Badekar
Badkar

Badkuip
Baignoire

3 T65

50 mm
2"

55 mm
2 1/8"

Ø60 mm
Ø2 3/8"

490 mm
19 1/4"

590 mm
23 1/4"

690 mm
27 1/8"

790 mm
31"

800 mm
31 1/2"


900 mm
35 3/8"

600 mm
23 5/8"



700 mm
27 1/2"





USA:
Max. flow rate:
1.6 Gal/min
6.0 l/min.

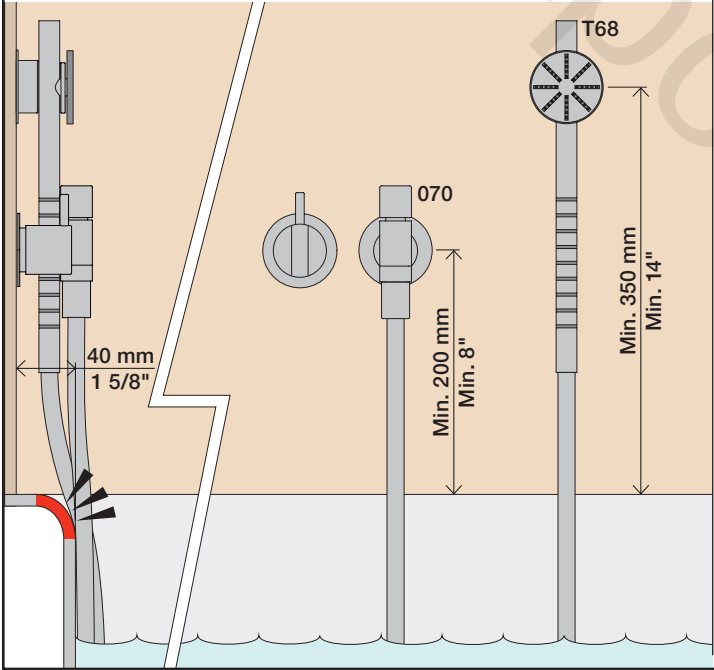

4

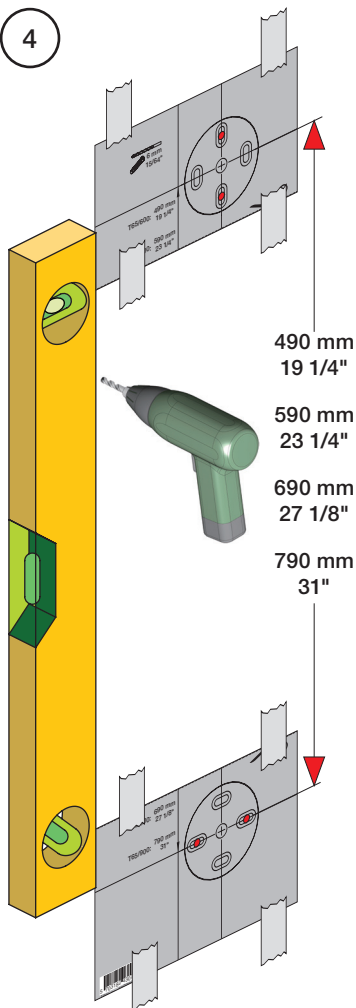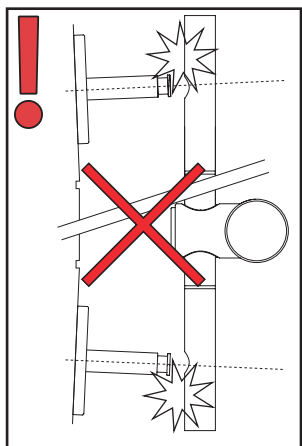490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"


5

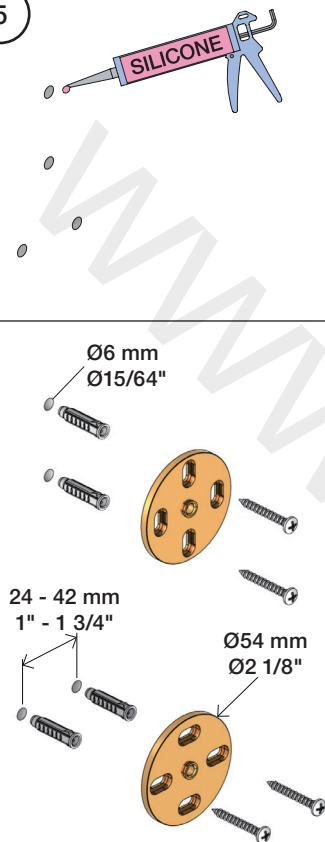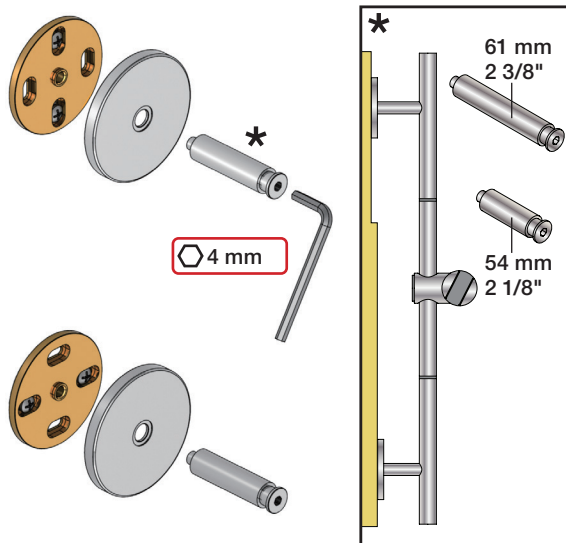Ø6 mm
Ø15/64"24 - 42 mm
1" - 1 3/4"Ø54 mm
Ø2 1/8"


Ø4 mm

61 mm
2 3/8"54 mm
2 1/8"

6

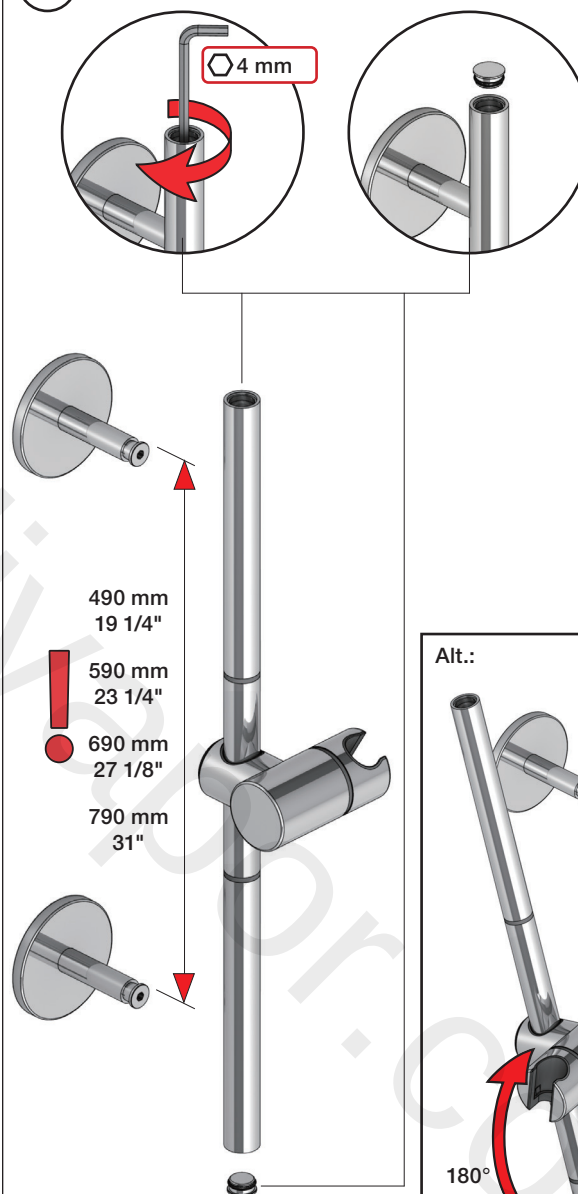

Ø4 mm

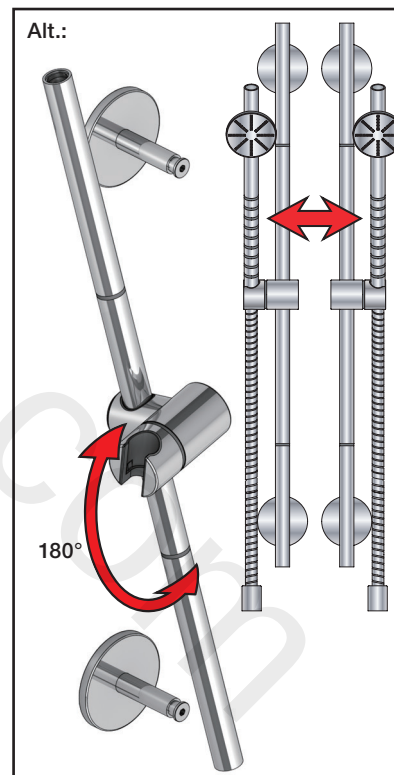490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"


Alt.:

180°


7



8

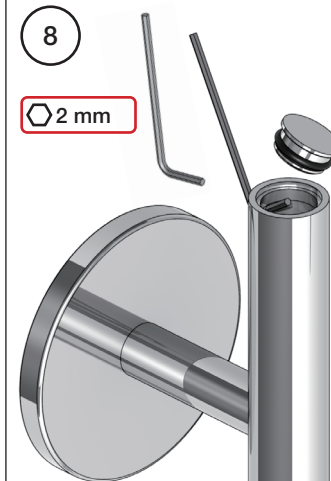

Ø2 mm

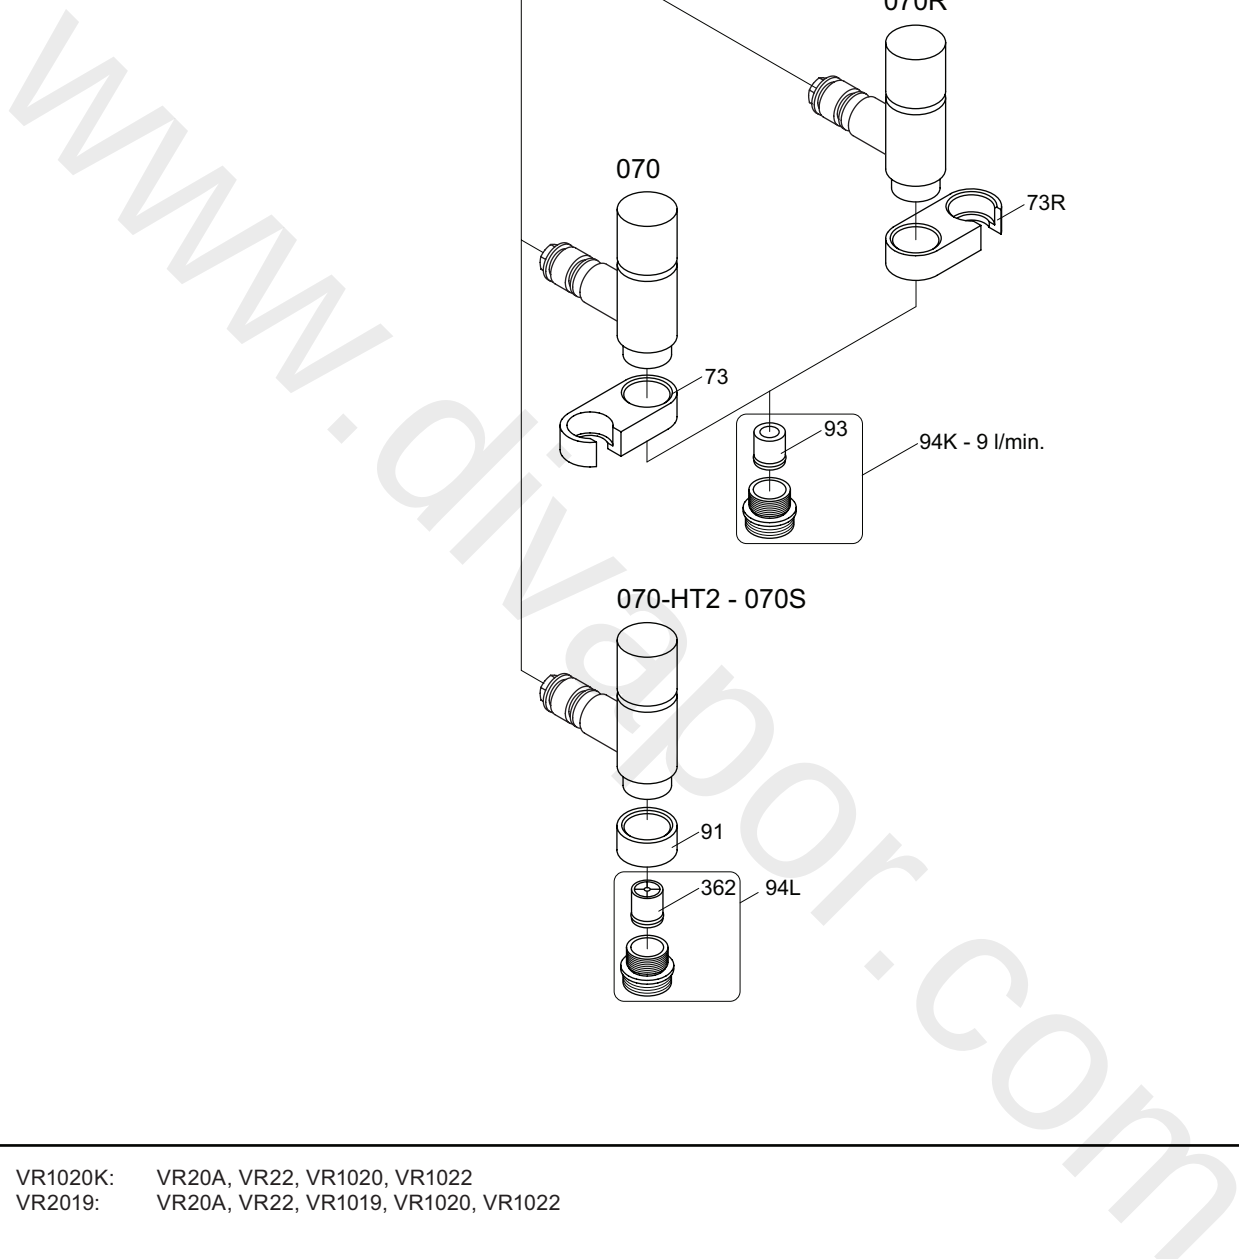

VR1020K:	VR20A, VR22, VR1020, VR1022
VR2019:	VR20A, VR22, VR1019, VR1020, VR1022



**VOLA 070, 070R
070-HT2**

Rev.

Sheet
SB 16