



Product features:

- Metal construction throughout
- Thermostatic valve for safety & comfort
- Minimalist planate design form
- Supplied with adjustable centre inlets
- Shower head height adjustment feature

Packaged properties:

Box length (mm): 790

Box depth(mm): 115

Box width(mm): 455


Boxed weight (Kg): 6.5

Includes pop up waste?: N/a

Additional comments:

Metal showerhead and handset

Product dimensions:

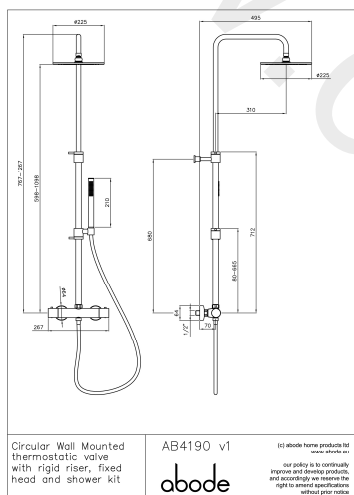

Circular Wall Mounted thermostatic valve with rigid riser, fixed head and shower kit


AB4190 v1
abode

(c) abode home products ltd
www.abode.co.uk

- Product mounted where: Wall
- Recommended hole size: N/A mm
- Overall Height / projection: 767-1267 mm
- Exit reach: 310 mm
- Exit height: 598-1098 mm
- Base size: 64 mm
- Inlet centre distance(s): 150+/-25 mm

- Min. fitting depth required: 60 mm
- Max. surface depth: N/A mm

Product flow characteristics:

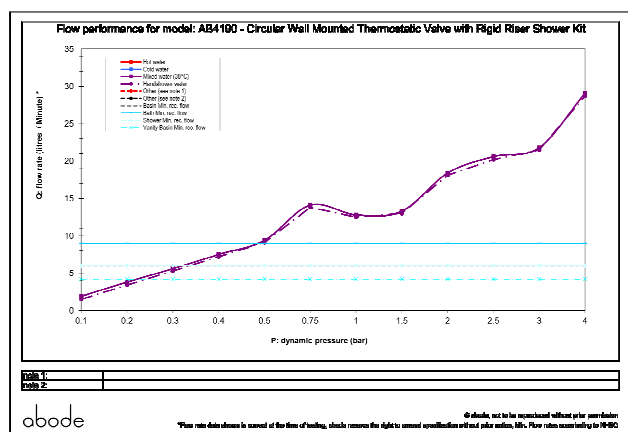

- Min / Max water pressure (bar): 0.50* / 5.50
- Part G max. mixed flow rate at 3 bar (l/m): 21.8
- Inlet connection type / length: Fixed / N/A mm
- Inlet (plumbing connection) / outlet size: 1/2" M / N/A
- Product flow characteristics: Single flow
- Non return valve(s) supplied or position: No
- Aerator type: N/a
- Control valve type: Thermostatic ()
- Includes output diverter?: Yes
- Inlet meshed particle filters included: N/A
- Shower hose type / length: Smoothflex / 1.50 m

Warranty Summary (full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives