


COBALT SHWR PK

COBALT Shower Range Complete Cobalt Recessed Dual Control Shower Pack

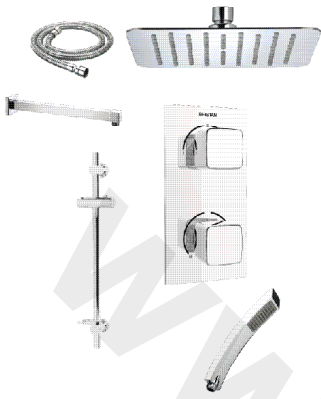

Features:

- Dual control
- Integral two outlet diverter
- Supplied with 200mm square shower rose, shower arm, wall outlet and a shower kit with single mode handset

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Style:	Contemporary
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Recessed
Shower Head Type:	Both
Valve/Cartridge Type:	35mm Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	60
Dynamic Pressure Range: (bar)	5
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All - Ideally balanced
Working Pressure Range:	Min. 0.2, Max. 5.0 Bar
Flow Rate: (l/min @ 3 bar)	33
Connection Inlet:	15mm Compression
Isolation Valve Included:	No
Check Valve Included:	No

Dimensions (measurements in mm)

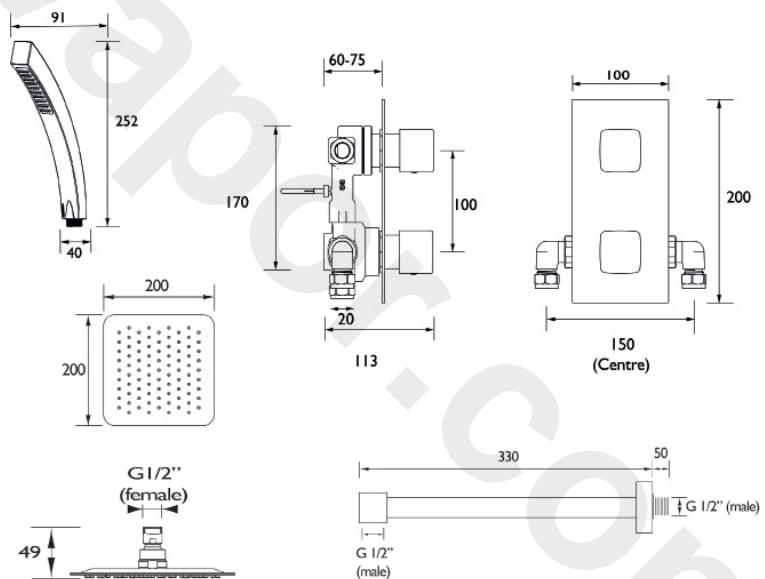

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1	6.9	12.8	19	27.6	33.8	43.6
Outlet 2	6.7	12.5	18.5	27	33	42.6

TECHNICAL DATA SHEET



BRISTAN

D5