

DESCENT SHWR PK

DESCENT Shower Range

Complete Descent Shower Pack




Features:

- This chunky shower pack contains our Descent shower valve with integral twin stopcocks which can feed two outlets simultaneously, a large 250mm slimline metal fixed head shower rose with ceiling fed arm and a stylish adjustable riser shower kit
- Fully serviceable from the front
- Chrome plated to BS EN 248

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Style:	Contemporary
Finish/Colour:	Chrome Plated
Main Construction Material:	Brass; ABS
No of Controls:	4
Shower Type:	Dual Control
Shower Head Type:	Fixed Head and Adjustable Riser Kit
Valve/Cartridge Type:	3/4" Ceramic Disc Valve 1/4 turn
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for all plumbing systems
Working Pressure Range:	Min: 0.2 bar, Max: 5 bar
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

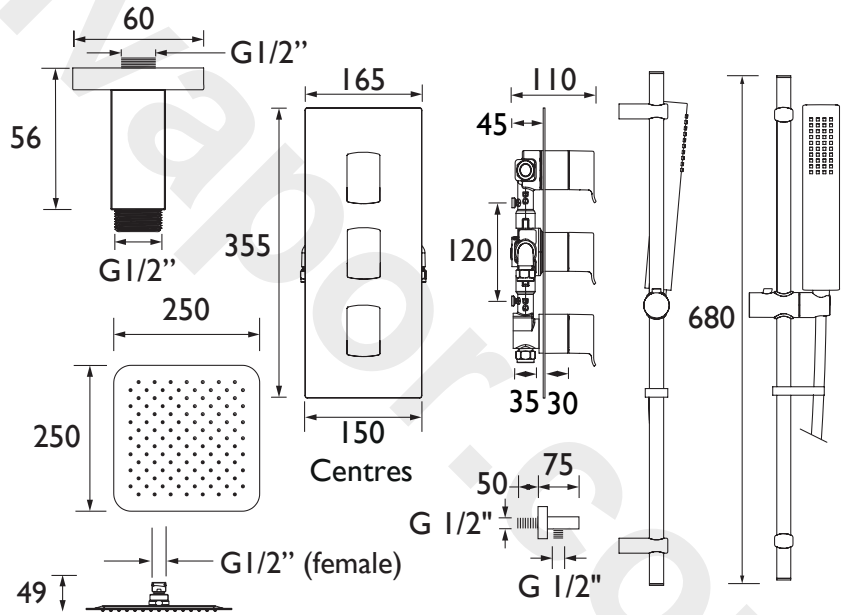

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1	7.7	14.2	20.7	29.2	35.8	46.2
Outlet 2	7.3	14	20.8	29.4	36	46.5

TECHNICAL DATA SHEET



BRISTAN

TAPS & SHOWERS

D3