

# EXD SHC3DIV C

## EXODUS Shower Range Exodus Recessed Thermostatic Dual Control Shower Valve with Integral Two Outlet Diverter and Stopcock Chrome



### Features:

- Rear access to service the filters
- Integral two outlet diverter and single stopcock
- Valve will fit in 35mm cavity space
- Separate controls for temperature and flow
- Cartridge can be accessed from the front

### Product Certifications:

WRAS Cert. Number: 2005900  
WRAS Expiry Date: 31/05/2025




Also available from the EXODUS Shower Range is:



### Specification

Style:	Contemporary
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	3
Shower Type:	Dual Control
Shower Head Type:	N/A
Valve/Cartridge Type:	Recessed
Maximum Hot Water Supply Temperature °C:	80
Dynamic Pressure Range: (bar)	Min. 0.2, Max. 5.0
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All - Ideally balanced
Flow Type:	N/A
Flow Rate (Open Outlet)	36.7
Connection Inlet:	15mm Compression Connections
Connection Outlet:	Open
Isolation Valve Included:	No
Check Valve Included:	No

### Dimensions (measurements in mm)

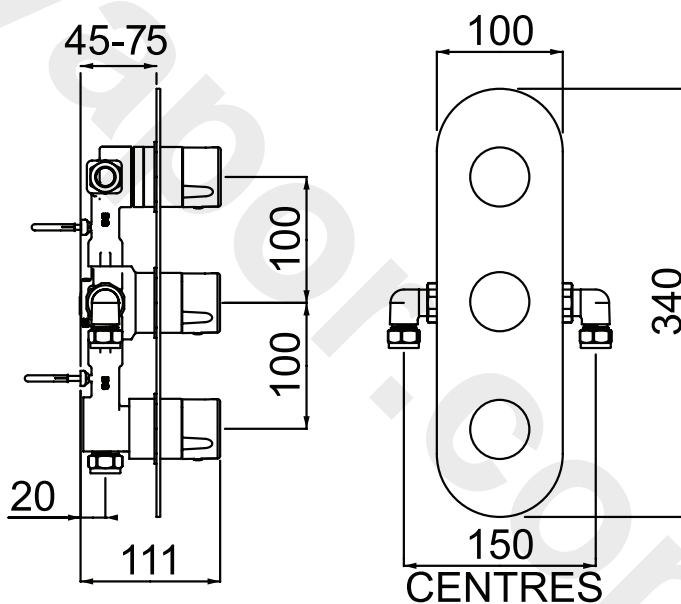

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1 (CD Valve)	9.4	15	21.2	30	36.7	47.4
Outlet 2 (Diverter)	8.2	13	18.5	25.1	32	41.3
Outlet 3 (Diverter)	8	12.7	18	25.4	31.1	40.2

TECHNICAL  
DATA  
SHEET

**BRISTAN**

D2