

EXD SHXAR C

EXODUS Shower Range Exodus Thermostatic Exposed Single Control Mini Valve With Adjustable Riser Chrome



Specification	
Style:	Contemporay
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Sequential
Shower Head Type:	Multifunction
Valve/Cartridge Type:	Sequential Cartridge
Maximum Hot Water Supply Temperature °C:	80
Dynamic Pressure Range: (bar)	Min. 0.2, Max 5.0
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All - Ideally balanced
Flow Type:	N/A
Flow Rate (Open Outlet)	9.1
Connection Inlet:	15mm Compression Elbows
Connection Outlet:	1/2" BSP
Isolation Valve Included:	No
Check Valve Included:	Yes

Features:


- Single sequential control for both temperature and flow
- Adjustable inlet centres mean you can use existing pipework with centres between 110mm and 155mm
- Automatic shutoff in the event of hot or cold water supply failure
- Check valves and serviceable filters as standard

Product Certifications:



WRAS Cert. No.: 1806065
WRAS Expiry Date: 30/06/2023

Dimensions (measurements in mm)

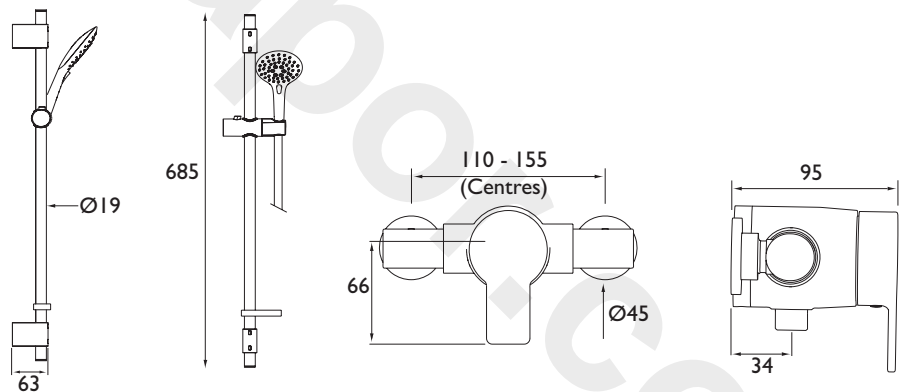

Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	4	5
Through Handset (mixed)	5.7	7.8	8.8	9.1	9.4	9.3

TECHNICAL
DATA
SHEET

BRISTAN
TAPS & SHOWERS

D2