

GWF BSM C

GLIDE Tap Range Glide Waterfall Bath Shower Mixer Chrome



Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Includes hose, handset and wall bracket


Product Certifications:



WRAS Certificate No: 1911004
WRAS Expiry Date: 30/11/2024




For more products, visit our website:
<http://www.bristan.com>



Specification

Product Type:	Bathroom Taps
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Lever
Connection Inlet:	3/4" BSP Male Connector
Connection Outlet:	Stainless Steel Integral Aerator
Number of Tap Holes:	2
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.1 bar
Maximum Dynamic Pressure (bar):	5.0 bar
Maximum Hot Water Temperature °C:	65°C
Maximum Static Pressure (bar):	10 bar
Flow Type:	Single
Isolation Included:	No

Dimensions (measurements in mm)

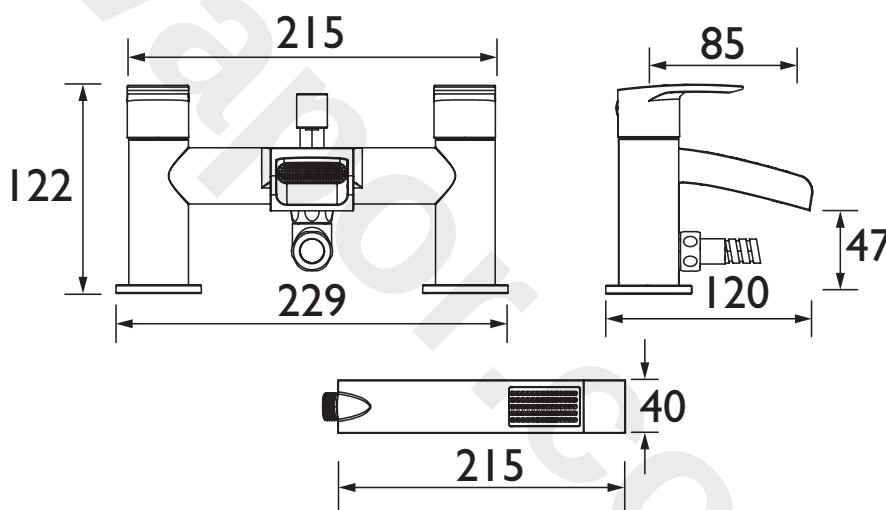

Flow Rates (l/min)

System Pressure (bar)	0.1	0.5	1	2	3	5
Through Bath Filler (mixed)	7.7	17.2	24.3	34.4	42.1	54.4
Through Handset (mixed)	2.6	5.7	8.1	11.4	14	18.1

TECHNICAL
DATA
SHEET



BRISTAN

D3