

# MALP SHCDIV GG

## ALP Shower Range Metallix Alp Concealed Dual Control Valve And Diverter Graphite Glisten




### Features:

- Metal backplate and handles
- Integral two outlet diverter
- Valve will in 35mm cavity space
- Fully serviceable from the front
- Supplied with wall outlet

### Specification

Style:	Contemporary
Finish/Colour:	Chrome/Graphite Glisten
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Dual Control
Valve/Cartridge Type:	Recessed
Maximum Hot Water Supply Temperature °C:	65
Dynamic Pressure Range: (bar)	5
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All Plumbing Systems
Working Pressure Range:	Min. 0.2 bar, Max. 5.0 bar
Flow Rate: (l/min @ 3 bar)	33
Connection Inlet:	1/2" BSP
Connection Outlet:	1/2" BSP
Isolation Valve Included:	No
Check Valve Included:	No

### Dimensions (measurements in mm)

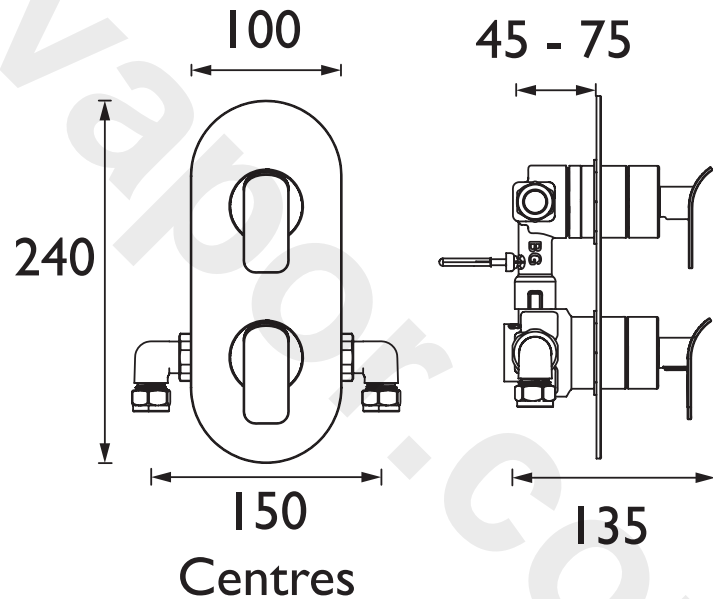

For more products, visit our website:  
<http://www.bristan.com>



### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	6.9	12.8	19	27.6	33	42.49

TECHNICAL  
DATA  
SHEET



**BRISTAN**  
TAPS & SHOWERS

D1