PIV BF C

PIVOT Tap Range Pivot Bath Filler Chrome



_					
ь.	\circ	a t	1.1	re	C
	て	au	u	ıc	Э.

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability


Specification						
Product Type:	Taps					
Main Construction Material:	Brass					
Mount Type:	Deck Mounted					
Handle Type:	Paddle Handles					
Connection Inlet:	3/4" BSP					
Connection Outlet:	Antisplash					
Number of Tap Holes:	2					
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve					
Plumbing System Requirements:	Suitable for all plumbing systems					
Minimum Dynamic Pressure (bar):	0.2 bar					
Maximum Dynamic Pressure (bar):	5.0 bar					
Maximum Hot Water Temperature °C:	65°C					
Maximum Static Pressure (bar):	10 bar					
Flow Type:	Single Flow					
Isolation Included:	No					

Product Certifications:

For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

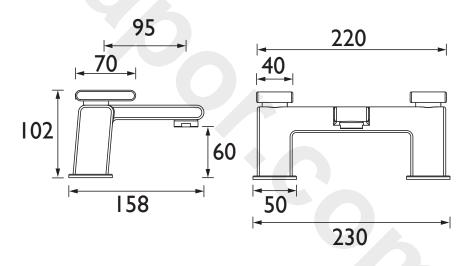

Flow Rates (I/min)										
System Pressure (bar)	0.2	0.5	1	2	3	5				
PIV BF C (mixed)	20.6	32.6	46.1	65.2	79.8	103				

TECHNICAL DATA SHEET



