PM BSM C

PRISM Tap Range Prism Pillar Bath Shower Mixer Chrome



_				
Н	മമ	TII	res	
	CU	ιu	」しつ	

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Easy to use lever handles
- Includes 1.75m hose, rub-clean anti-limescale handset and wall bracket
- High performance even at low pressures

Product Certifications:






For more products, visit our website: http://www.bristan.com



Specification						
Product Type:	Taps					
Main Construction Material:	Brass					
Mount Type:	Deck					
Handle Type:	Lever					
Connection Inlet:	3/4" BSP					
Connection Outlet:	Flow Straightener					
Number of Tap Holes:	2					
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn					
Plumbing System Requirements:	Suitable for all plumbing systems					
Minimum Dynamic Pressure (bar):	0.2 bar					
Maximum Dynamic Pressure (bar):	5.0 bar					
Maximum Hot Water Temperature °C:	65°C					
Maximum Static Pressure (bar):	10 bar					
Flow Type:	Single					
Isolation Included:	No					

Dimensions (measurements in mm)

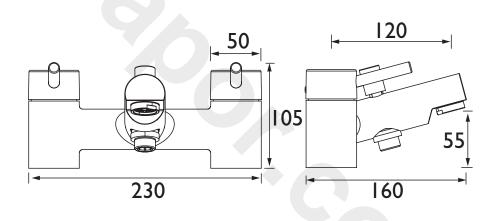

Flow Rates (I/min)										
System Pressure (bar)	0.2	0.5	1	2	3	5				
Through Bath Filler (mixed)	10.3	16.2	22.9	32.4	39.7	51.3				
Through Handset (mixed)	5	7.9	11.1	15.8	19.3	24.9				

TECHNICAL DATA SHEET



