



Features:

- Includes 1.75m hose, handset and wall bracket
- Wall bracket and single function handset
- Chrome plated to BS EN 248

Product Certifications:



WRAS Certificate No: 2012056
 WRAS Expiry Date: 31/12/2025




For more products, visit our website:
<http://www.bristan.com>



Specification

Product Type:	Taps
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Crosshead
Connection Inlet:	3/4" BSP
Connection Outlet:	M24 Anti-Splash
Number of Tap Holes:	2
Valve/Cartridge Type:	1/2" Compression Valve
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2 bar
Maximum Dynamic Pressure (bar):	5.0 bar
Maximum Hot Water Temperature °C:	65°C
Maximum Static Pressure (bar):	10 bar
Flow Type:	Single
Isolation Included:	No

Dimensions (measurements in mm)

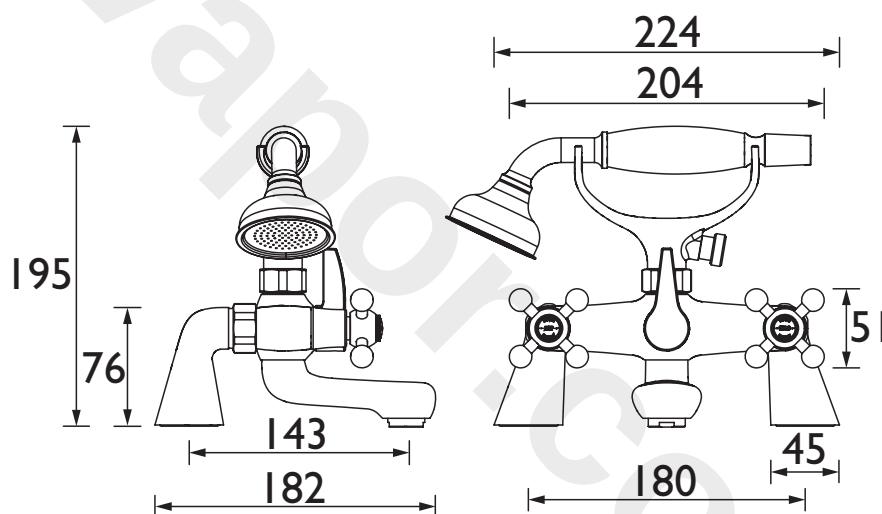

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Bath Filler (mixed)	24.7	39.1	55.3	78.2	95.8	123.7
Through Handset (mixed)	6.4	10.1	14.3	20.2	24.7	31.9

TECHNICAL DATA SHEET



BRISTAN

D13